



The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 01/16/09		LJC 01/16/09
B	DRAWING UPDATE	JLZ 06/14/19'		



Single type

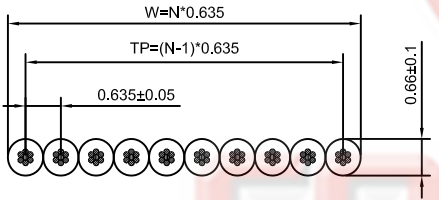


Stranded type


NOTES:

- Insulation material: PVC
Color: Gray
- SPECIFICATION**
 - Rating: 150V
 - Conductor Size: 30AWG
 - Insulation resistance: 100MΩ/km min.
 - Contact resistance: 377Ω/km max.
 - Insulation thickness average: 7 mil.
 - Minimum insulation thickness : 6 mil.
- APPLICATION**
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.


4. Product Number Code

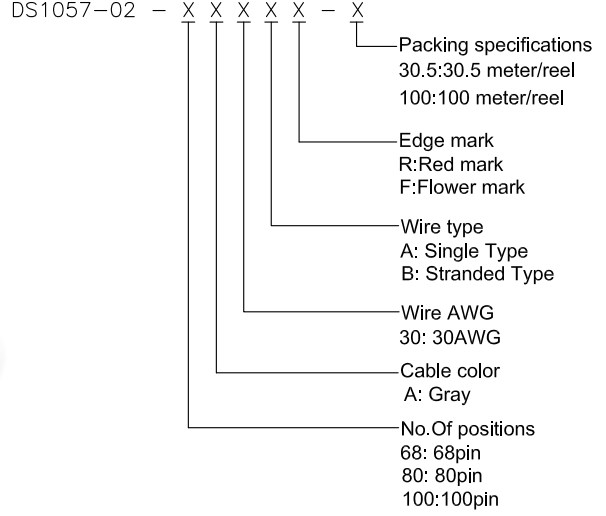


No. of positions	Dimensions		
	TP(mm)	W(mm)	Tolerance
68	42.545	43.18	±0.25
80	50.165	50.80	±0.25
100	62.865	63.50	±0.25

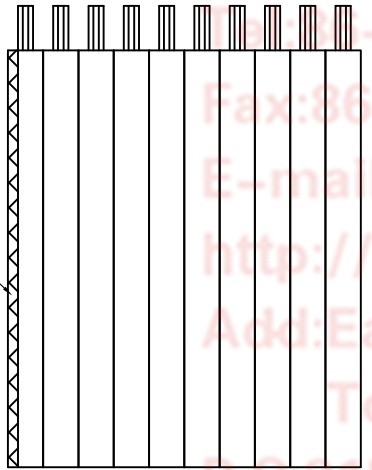

RED MARK

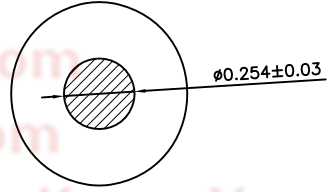

Single type

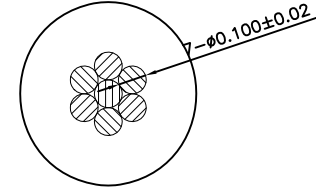

Stranded type

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	UL 2678 FLAT CABLE PITCH 0.635mm		
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4		
.X	±0.38	.X	±3°			SERIES	DS1057-02 SERIES		
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD				
SCALE		1:1	SHEET 1 OF 1						
DRAWING NO.		C-DS1057-02-XXXXX-X-B							

1 2 3 4 5 6 7 8