
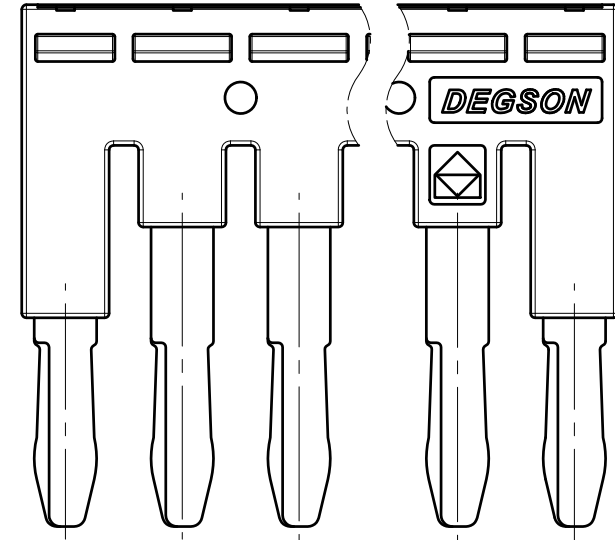
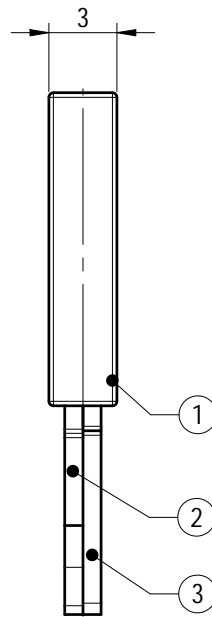
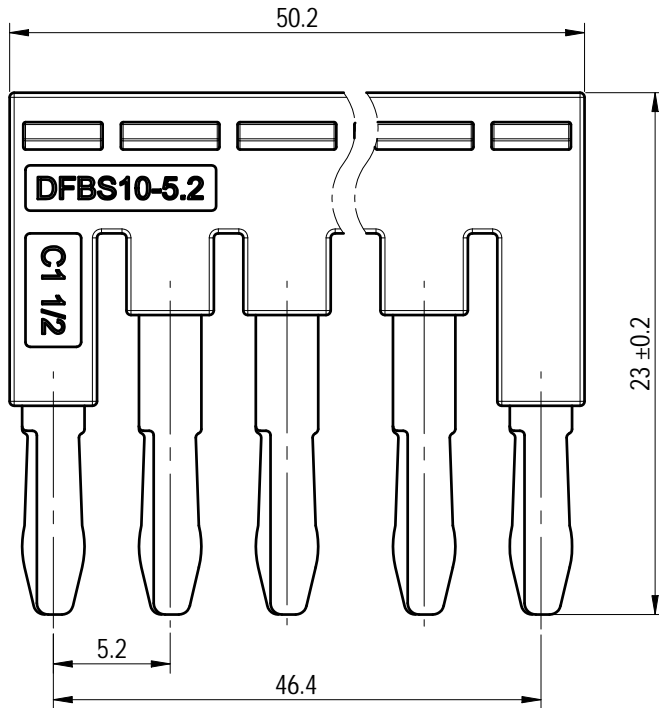
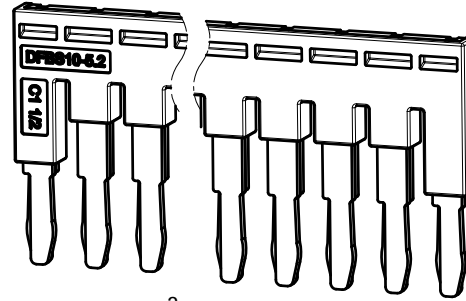


未注公差/General tolerances (mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	



3	Current_carrier2	Copper	Sn_Plated
2	Current_carrier1	Copper	Sn_Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

间距/Pitch(mm)/线数范围/Poles	5.2/10P
使用温度范围/Operating temperature(°C)	-40~+105
符合 RoHS 环保要求/Conform to RoHS	Yes

APPD: Peng M	2022.06.15
CHKD: Gao WG	2022.06.15
DRFT: Huang RJ	2022.06.15
A4	

MATERIAL: /	SURFACE/COLOR: /	
MAT NO./REV: /	MAT STATUS: /	
NAME		
DFBS10-5.2-1Y-00A(H)		
DRAWING NO. /	TYPE	DRAWING STATUS
/	CUSTOMER DRAWING	/
SCALE	3:1	SHEET
/	1/1	/

00	/	/	Huang RJ	2022.06.15
REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by Degson. All rights reserved for patent. 除专利声明外，其他内容均受法律保护。未经授权，不得复制或传播。 未经授权，不得复制或传播。 未经授权，不得复制或传播。