
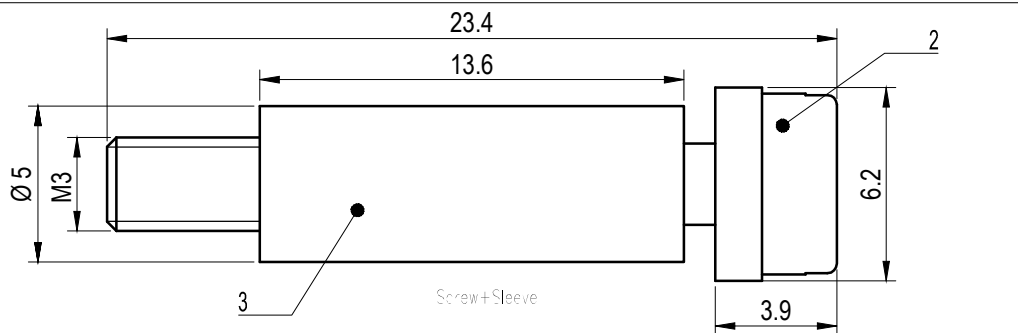
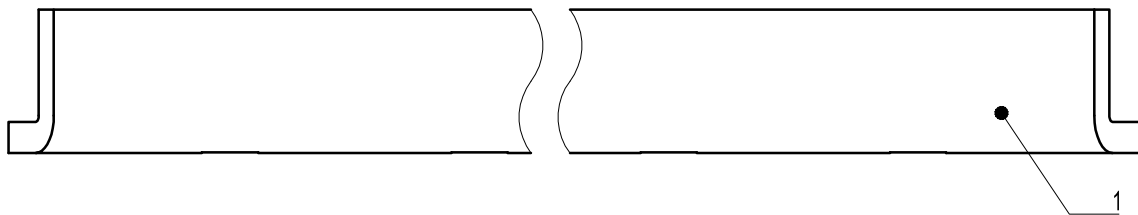
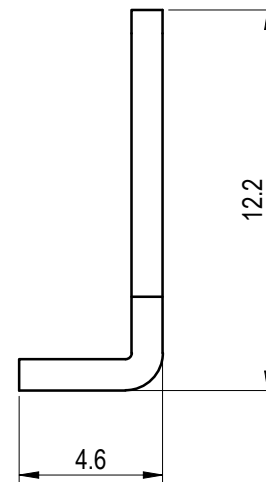


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 未经授权复制或传播本文件内容，或在本文件内容中使用、复制或传播其内容，均属侵权行为，公司将依法追究。本公司保留对涉及发明、实用新型和外观设计等知识产权的权利。

公差/General tolerances(mm)													0.1/10	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500		>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2*
间距/Pitch(mm)/线数范围/Poles												8.0/N=02~10P		
符合RoHS环保要求/Conform to RoHS												Yes		

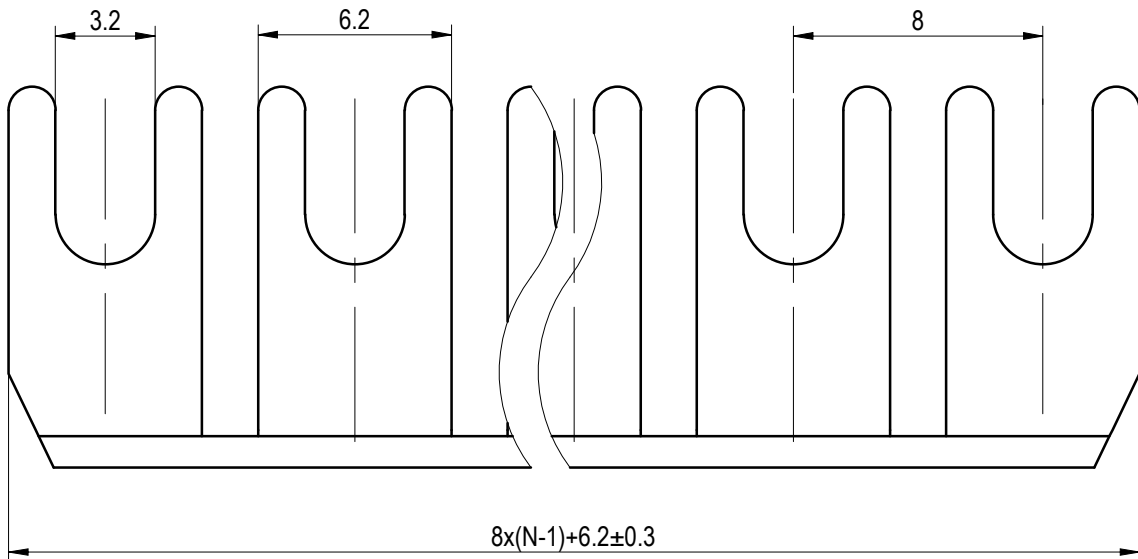

ITEM	NAME OF PART	MATERIAL	NOTES
3	Sleeve	Copper alloy	Sn Plated
2	Screw	Copper alloy	M3/Ni Plated
1	Current carrier	Copper	Sn Plated

		MATERIAL: /		SURFACE/COLOR: /	
APPD: PengM 2022.06.20		MAT NO./REV: / /		MAT STATUS: /	
CHKD: GaoWG 2022.06.20		NAME: FBRI6-RTK/S-XXP-00A(H)			
DRFT: XieXD 2022.06.20		DRAWING NO. /		TYPE: CUSTOMER DRAWING	
00 /		DRAWING STATUS: /		SCALE: 4:1	
REV: /		ECN: /		SHEET: 1/1	
DESCRIPTION: /		DRFT: XieXD		DATE: 2022.06.20	
/		A4		mm (inch)	