
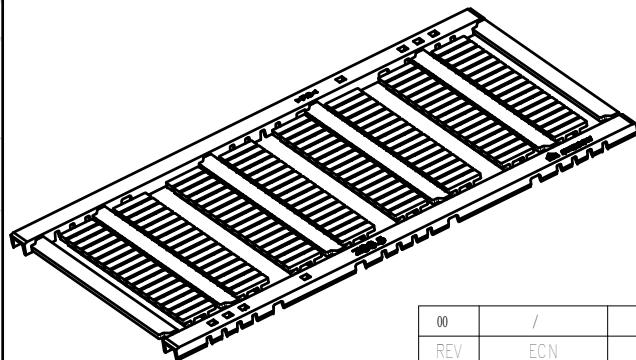
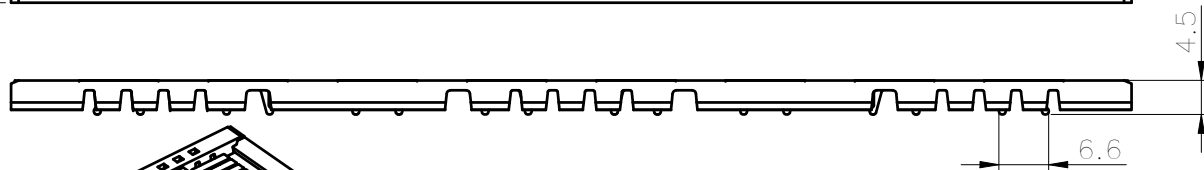



未注公差/General tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10 ±2'
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

间距/Pitch(mm) / 线数范围/Poles	3.5/N=136P
使用温度范围/Operating temperature(°C)	-40~+110
符合 RoHS 环保要求/Conform to RoHS	Yes

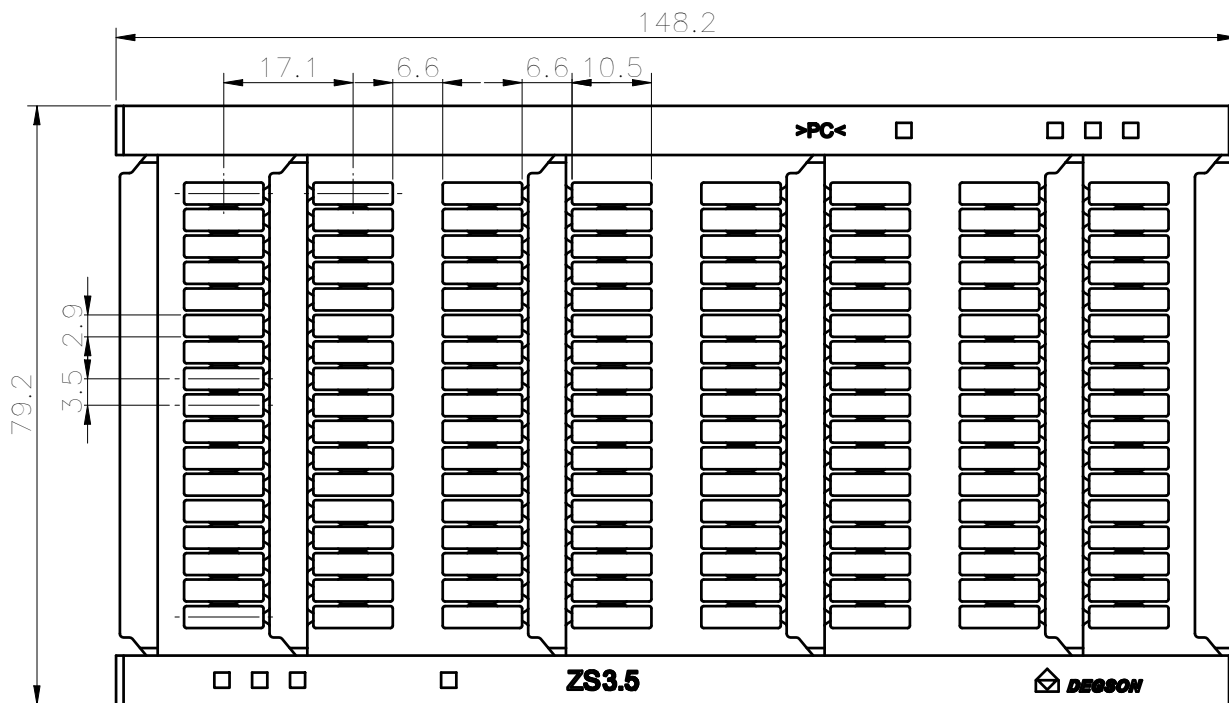

00	/	/	Chen KZ	2022.06.08
REV	ECN	DESCRIPTION	DRFT	DATE

		MATERIAL: PC	SURFACE: /		
		MAT. NO./REV: /	MAT STATUS: /		
APPD: Peng M	2022.06.08	NAME			
CHKD: Gao WG	2022.06.08	ZS3. 5-136P-1Y-00A(H)			
DRFT: Chen KZ	2022.06.08				
DRAWING NO. /		TYPE	DRAWING STATUS	SCALE	SHEET
/		CUSTOMER DRAWING	/	1:1	1/1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. All rights reserved for patent, utility model or designs registrations. 非经书面授权, 否则禁止转让、复制、利用、交加本文件内容, 一经发现将追究法律责任, 一经发现将追究法律责任, 实用新型和外观设计的所有权利。