
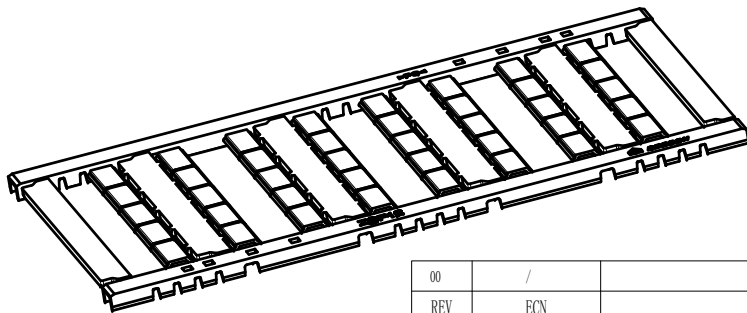


未注公差/General tolerances (mm)														0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	
间距/Pitch(mm) / 线数范围/Poles										12.2/N=40P				
使用温度范围/Operating temperature(°C)										-40~+110				
符合 RoHS 环保要求/Conform to RoHS										Yes				

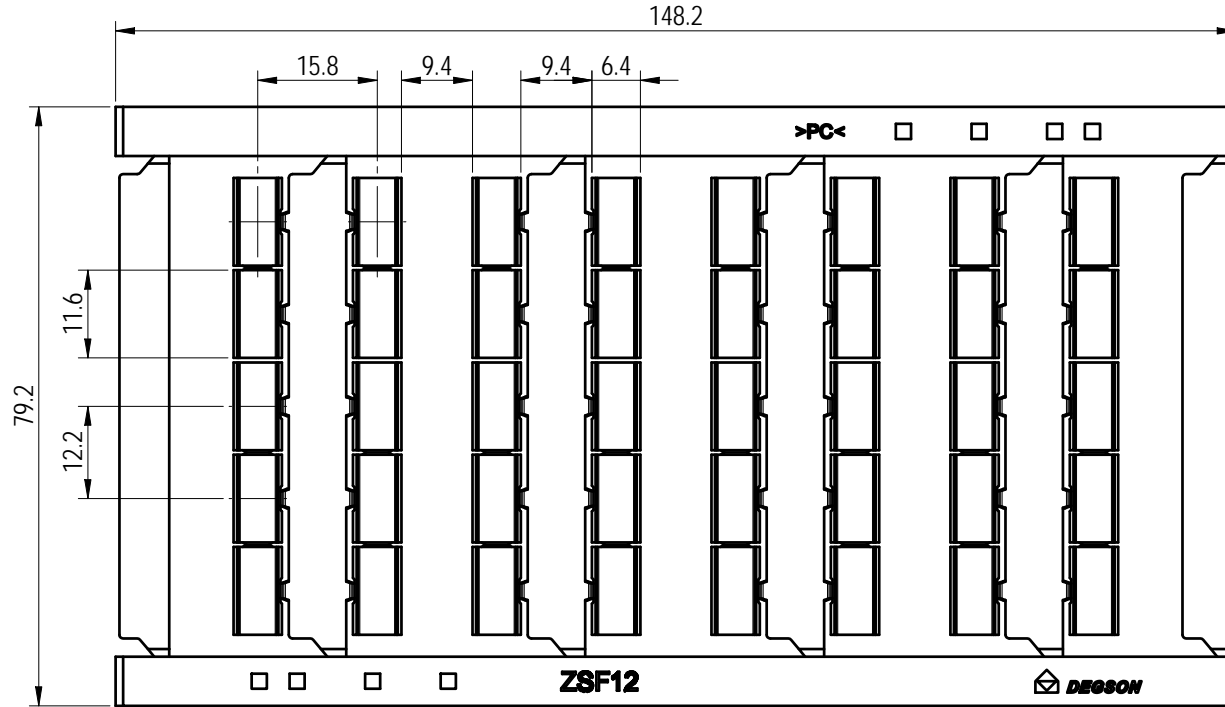

00	/	/	Chen KZ	2022.06.09
REV	ECN	DESCRIPTION	DRFT	DATE

		MATERIAL: PC	SURFACE/COLOR: /		
		MAT NO./REV: /	MAT STATUS: /		
APPD: Peng M	2022.06.09	NAME			
CHKD: Gao WG	2022.06.09	ZSF12-40P-1Y-00A(H)			
DRFT: Chen KZ	2022.06.09				
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET	
/	CUSTOMER DRAWING	/	1:1	1/1	

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by DEGSON. All rights reserved for patent. 除专利注明情况外，其他内容均受版权保护。未经授权，不得复制或传播。DEGSON 保留所有权利。未经许可，不得复制或传播。DEGSON 保留所有权利。