
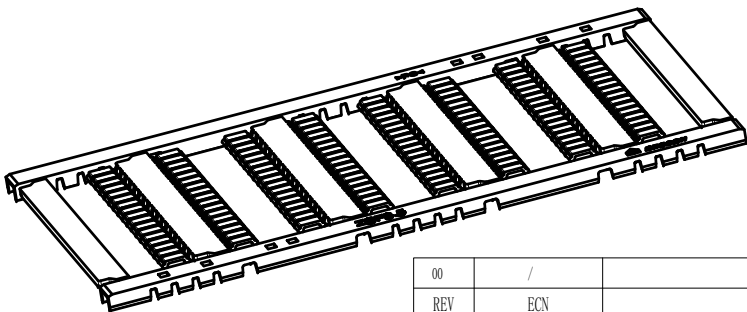


未注公差/General tolerances (mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10 ±2'	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	
间距/Pitch(mm) / 线数范围/Poles										3.5/N=136P				
使用温度范围/Operating temperature(°C)										-40~+110				
符合 RoHS 环保要求/Conform to RoHS										Yes				

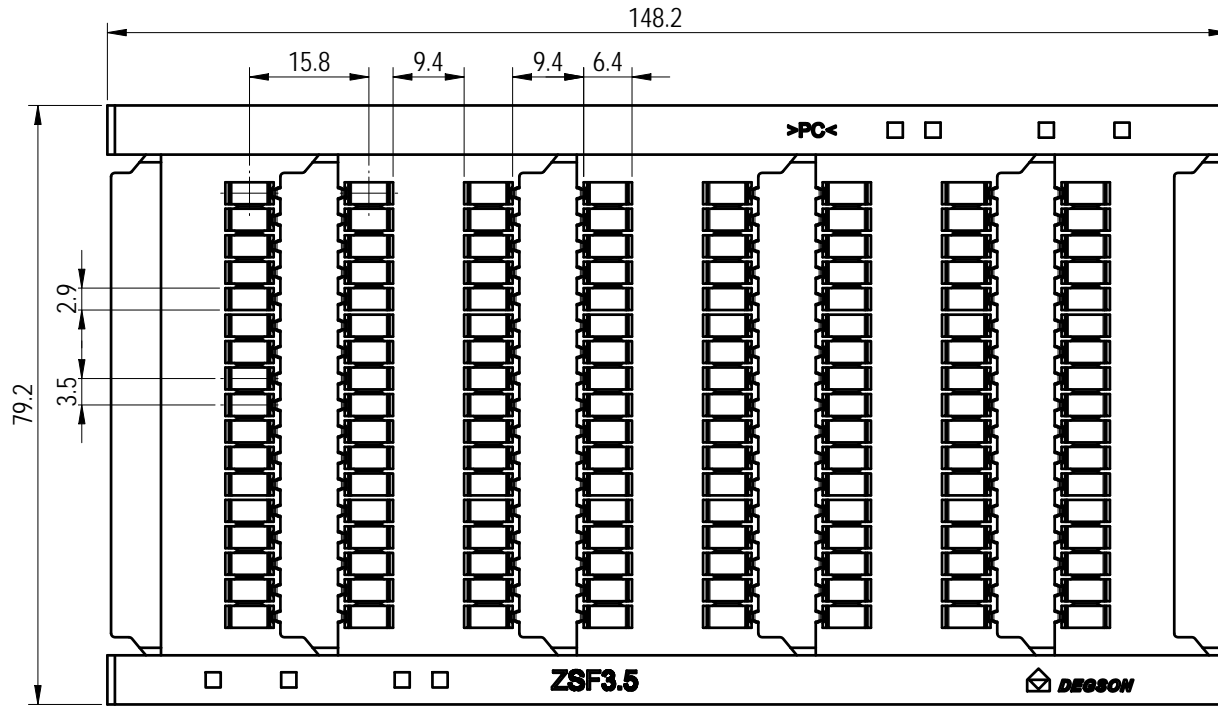

00	/	/	Chen KZ	2022.06.09
REV	ECN	DESCRIPTION	DRFT	DATE

		MATERIAL: PC		SURFACE/COLOR: /	
		MAT NO./REV: /		MAT STATUS: /	
APPD: Peng M	2022.06.09	NAME			
CHKD: Gao WG	2022.06.09	ZSF3.5-136P-1Y-00A(H)			
DRFT: Chen KZ	2022.06.09				
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET	
/	CUSTOMER DRAWING	/	1:1	1/1	

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by the copyright holder. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、软件著作权等依法享有权利外，其他权利均归权利人所有。