
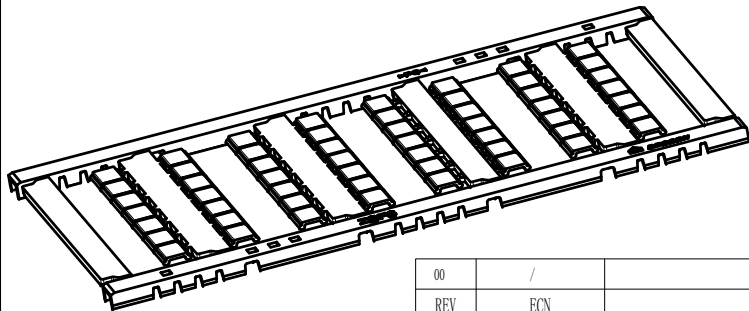


未注公差/General tolerances (mm)													0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		>500
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'
间距/Pitch (mm) / 线数范围/Poles											8.2/N=56P			
使用温度范围/Operating temperature (°C)											-40~+110			
符合 RoHS 环保要求/Conform to RoHS											Yes			

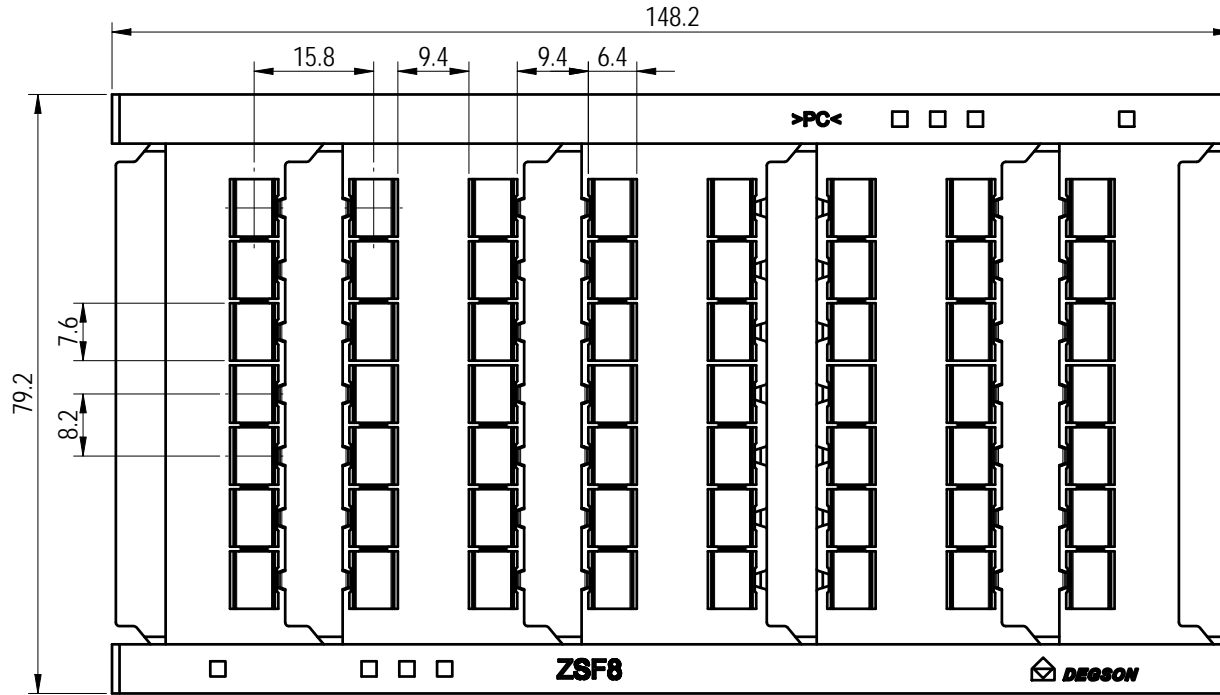

<b>DEGSON</b>		MATERIAL: PC	SURFACE/COLOR: /	
		MAT NO./REV: /	MAT STATUS: /	
APPD: Peng M	2022.06.09	NAME		
CHKD: Gao WG	2022.06.09	ZSF8-56P-1Y-00A (H)		
DRFT: Chen KZ	2022.06.09			
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
/	CUSTOMER DRAWING	/	1:1	1/1

00	/	/	Chen KZ	2022.06.09
REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing by the copyright holder. All rights reserved for patent. 除专利注明情况外，其他部分均按国家现行标准执行。未经许可，不得复制或传播。 除专利注明情况外，其他部分均按国家现行标准执行。 未经许可，不得复制或传播。

A  
B  
C  
D