
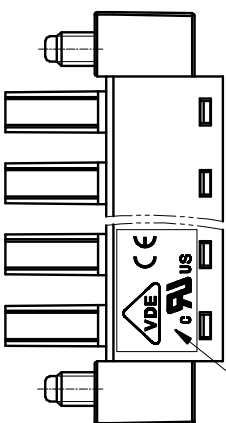

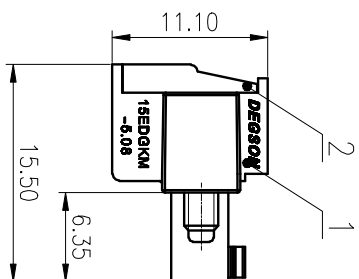
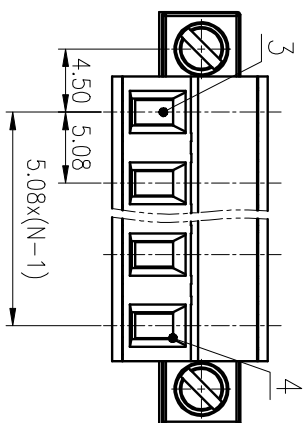


精度等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
3	~	~	~	~	~	~	~	~	~	~	~	~	±Z
6	10	18	30	50	80	120	180	250	315	400	500	±Z	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

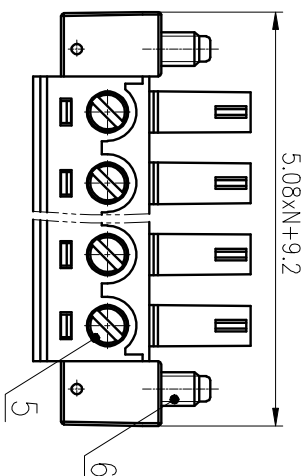

The certification mark is available on the left or right

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Clamp	Copper Alloy	Sn Plated
4	Cage	Copper Alloy	M2/IN Plated
5	Screw 1	Steel	M2/Zn Plated
6	Screw 2	Steel	M2.5/Zn Plated

UL 标准/UL Standard:		B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/8	/	/	300/8
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级	II/2			
绝缘/Insulation Degree	450/77			
额定电压/电涌/Rated Voltage(V)/Current(A)	4			
额定冲击电压(kV)/Rate Impulse Voltage(kV)	M2, 0.2/1.77			
额定扭矩/Torque Tightening(N·m/Lb·in)	0.5~1.5/28~16			
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	5.08/N=02~12P			
间距/Pitch(mm)/线数范围/Poles	6~7			
剥线长度/Stripping length(mm)	-40~+105			
使用温度范围/Operating temperature(°C)	Yes			
符合RoHS要求/Conform to RoHS				

MATERIAL: /

SURFACE: /

**NINGBO DEGSON ELECTRICAL CO., LTD**  
宁波高松电子有限公司

MAT NO.: /

NAME: 15EDGKM-5.08-XXP-1Y-00A(H)

STATUS: /

APPD: LANCH 2020.05.27

CHKD: YJZ 2020.05.27

DRAWING NO.: 15EDGKM-5.08-C01

DFT: FRZ 2015.11.16

TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DFT	DATE
1				
2				
3				

SIZE: A4

SCALE: 2:1

SHEET

1/1