

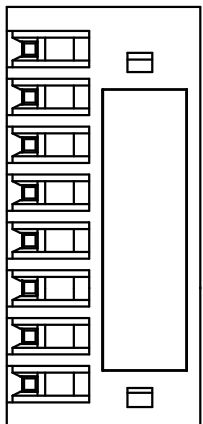
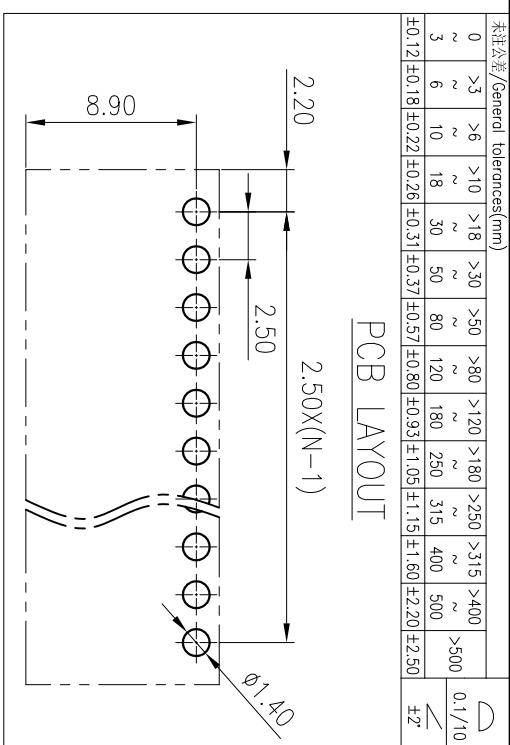
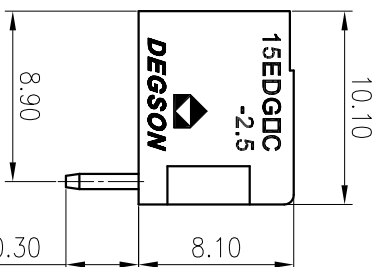
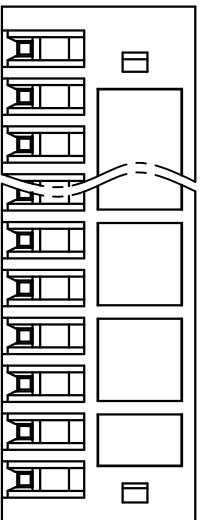


02P

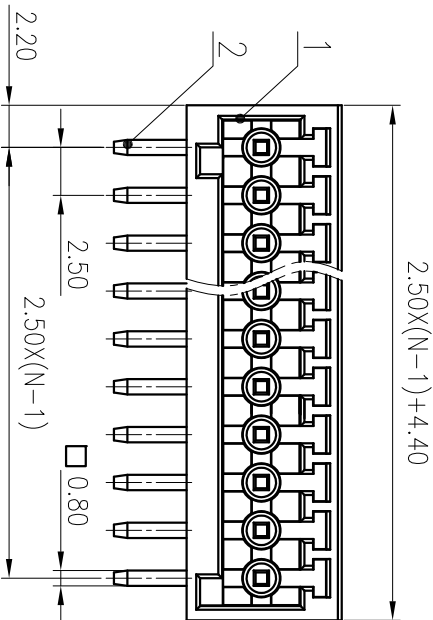

08P

8P and 8P following no reinforcement.



| 公差表/General Tolerances(mm) | |
|----------------------------|--------|
| 0 | >3 |
| ~ | ~ |
| 3 | >6 |
| ~ | ~ |
| 6 | >10 |
| ~ | ~ |
| 10 | >18 |
| ~ | ~ |
| 18 | >30 |
| ~ | ~ |
| 30 | >50 |
| ~ | ~ |
| 50 | >80 |
| ~ | ~ |
| 80 | >120 |
| ~ | ~ |
| 120 | >180 |
| ~ | ~ |
| 180 | >250 |
| ~ | ~ |
| 250 | >315 |
| ~ | ~ |
| 315 | >400 |
| ~ | ~ |
| 400 | >500 |
| ~ | ~ |
| 500 | >500 |
| ~ | ~ |
| ±0.12 | ±0.18 |
| ±0.22 | ±0.26 |
| ±0.31 | ±0.37 |
| ±0.57 | ±0.80 |
| ±0.93 | ±1.05 |
| ±1.15 | ±1.60 |
| ±2.20 | ±2.50 |
| ±2 | ±2 |
| 0.1/10 | 0.1/10 |
| ±2' | ±2' |

| ITEM | NAME OF PART | MATERIAL | NOTES |
|--|--------------|--------------|-----------|
| 2 | Pin | Copper alloy | Sn Plated |
| 1 | Housing | PA66 | UL94V-0 |
| UL 标准/UL Standard: B C D | | | |
| 额定电压/电流/Rated Voltage(V)/Current(A) 150/4 / / / | | | |
| IEC 标准/IEC Standard: / / / | | | |
| 过压类别/Overvoltage Category/污染等级/Pollution Degree III/3 III/2 II/2 | | | |
| 额定电压/电流/Rated Voltage(V)/Current(A) / / / 250/5 | | | |
| 额定脉冲电压(KV)/Rate Impulse Voltage(KV) / / / 2.5 | | | |
| 间距/Pitch(mm)/线数范围/Poles 2.50/N=02~12P | | | |
| 使用温度范围/Operating Temperature(°C) -40~+105 | | | |
| 符合RoHS环保要求/Conform to RoHS Yes | | | |

SURFACE:

MATERIAL:

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD



MAT NO.: /

STATUS: /

APPD: Lgn CHH 2020.03.19

CHKD: Yu JZh 2020.03.19

NAME: 15EDGRC-2.5-XXP-1Y-00A(H)

DRAWING NO.: 15EDGRC-2.5-C01

DRFT: LIN 2008.10.20

TYPE: CUSTOMER DRAWING

| REV | ECN | DESCRIPTION | DRFT | DATE |
|-----|-----|--|--------|------------|
| (1) | | Change the drawing and tolerance table | Yu JZh | 2020.03.19 |

管 发 中 心
文 研 发 专 用
2020.03.19
(仅限内部使用, 对外无效)