


公差/General Tolerances(mm)	
0	>3
~	>6
~	>10
~	>18
~	>30
~	>50
~	>80
~	>120
~	>180
~	>250
~	>315
~	>400
~	>500
~	>630
~	>800
~	>1000
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±1.05	±1.15
±1.60	±2.20
±2.50	±2.50
∅	0.1/10
±Z	±Z

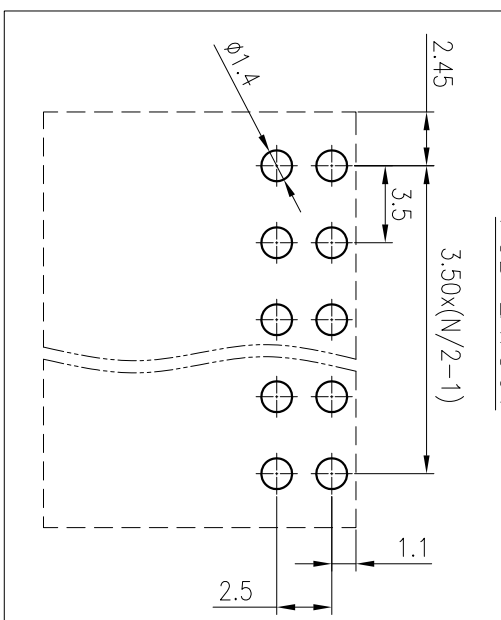

REV	ECN	DESCRIPTION	DRAFT	DATE
1		Drawing update	Bo YH	2021.01.11

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD: Lon CHH	2021.01.11
CHKD: Yu JZh	2021.01.11
DRAFT: CZ	2018.09.14
SIZE: A4	mm / inch
TYPE: CUSTOMER DRAWING	SCALE: 3:1
NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	REV T1
15EDGRHD-3.5-XXP-1Y-00A(H)	1/1
DRAWING NO.: 15EDGRHD-3.5-C01	REV T1
TYPE: CUSTOMER DRAWING	SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Pin 1	Copper	
3	Pin 2	Copper	Sn Plated

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)	150/10	/	/
额定电流/Rated Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	80/10	125/10	250/10
额定脉冲电压/Rate Impulse Voltage(KV)	2.5	2.5	2.5
间距/Pitch(mm)	3.5/N=4~48P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

SURFACE: /