

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 8A
- 2.Withstanding voltage : AC1600V/1Min.

IEC Standard

1.

Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	8A

NOTES2:







- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.5mm, Poles : N=04~48P
- 3.Operating temperature: -40°C~+130°C
- 4.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				-	∩	∇
To	Over To	To	Over To	Over To	Over To	0.1/10		
6	10	30	60	100	150	<		
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

5.RoHS Compliance

15EDGVHBN-THR - 3.5 - XXP - 1Y - 10A (H)  
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)  
 3.(Black)  
 5.(Orange)

H  
G  
F  
E  
D  
C  
B  
A

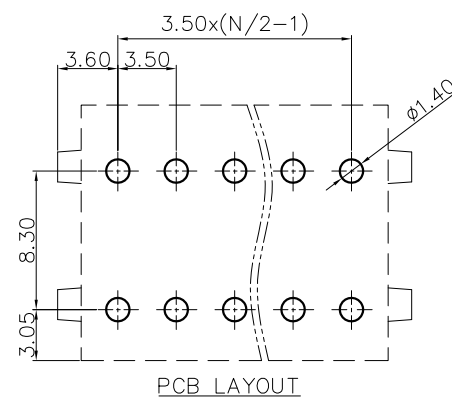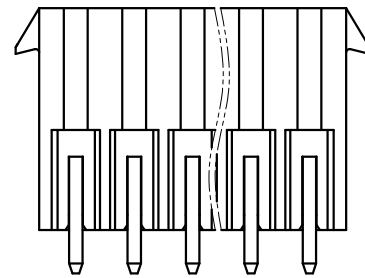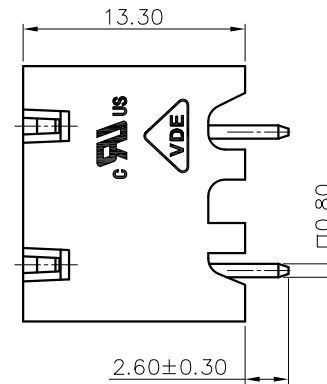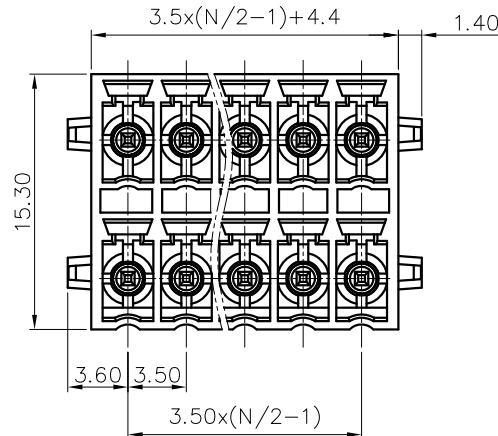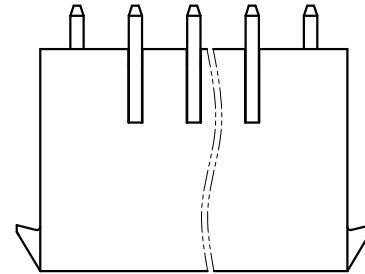

DETACHED LISTS	PART NO.:	NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: 15EDGVHBN-THR-3.5-XXP-1Y-10A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING		REV	D0
	DRFT:	DRAWING NO.:		SHEET	1/1
THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SCALE	1:1

H  
G  
F  
E  
D  
C  
B  
A