
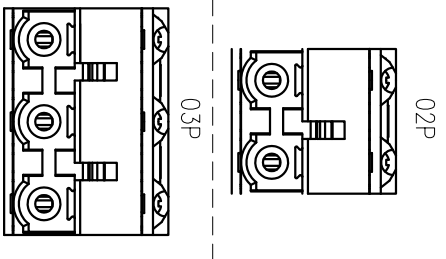
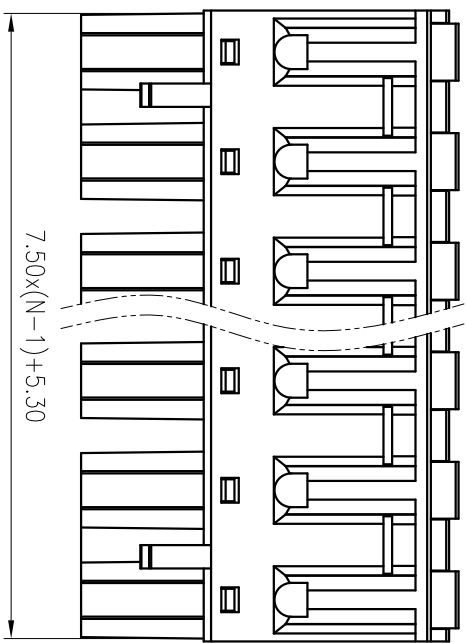
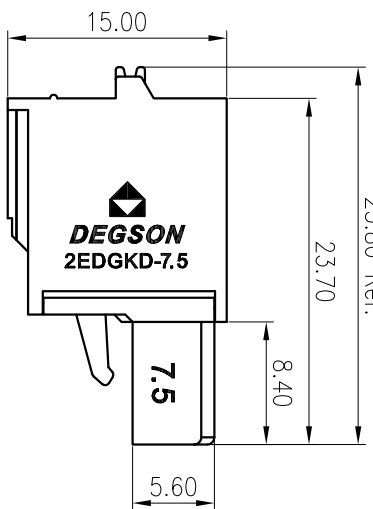
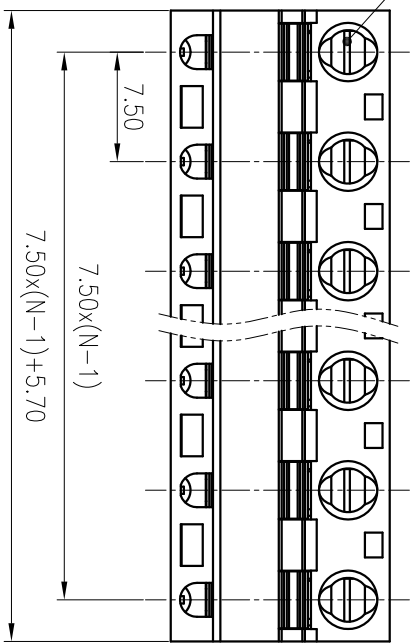
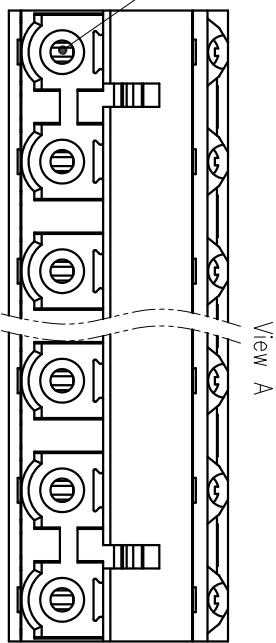


公差等级/General tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2.50	±Z

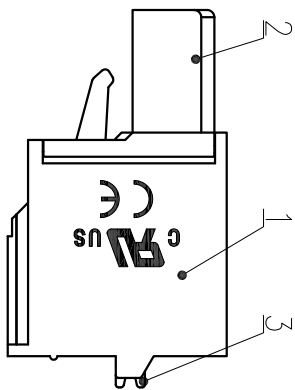

5	Spring	Stainless steel	/
4	Clamp	Copper alloy	Sn Plated
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/电压/Rated Voltage(V)/Current(A) 300/10 / 300/10			
IEC 标准/IEC Standard: B C D			
过压类别/Overvoltage Category/污染等级 III/3 III/2 II/2			
级/Pollution Degree			
额定电压/电流/Rated Voltage(V)/Current(A) / 400/20 /			
额定脉冲电压(KV)/Rate Impulse Voltage(KV) / 4 /			
规格范围(硬度和软度)/Wire Range(rigid and flexible)(mm ² /AWG) 0.2~2.5/26~12			
间距/Pitch(mm)/线数范围/Poles 7.5/N=02~16P			
剥线长度/Stripping length(mm) 9-10			
使用温度范围/Operating Temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			
MATERIAL: SURFACE: /			

MATERIAL: /		NINGBO DEGSON ELECTRICAL CO., LTD	
MAT NO.: /		2EDGKD-7.5-XXP-1Y-00A(H)	
STATUS: /		DRAWING NO.: 2EDGKD-7.5-C01	
APPD: Li GL 2020.05.26		NAME: 宁波高松电子有限公司	
CHKD: Mo EK 2020.05.26		DEGSON®	
DRT: LongHM 2019.01.14		DRT: LongHM 2019.01.14	
SIZE: A4		TYPE: CUSTOMER DRAWING	
SCALE: 2:1		SCALE: 2:1	
SHEET 1/1		SHEET 1/1	