
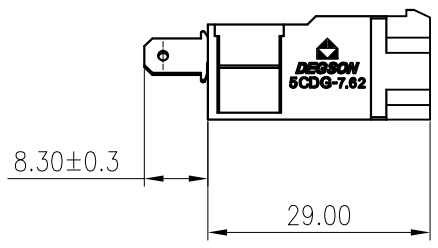
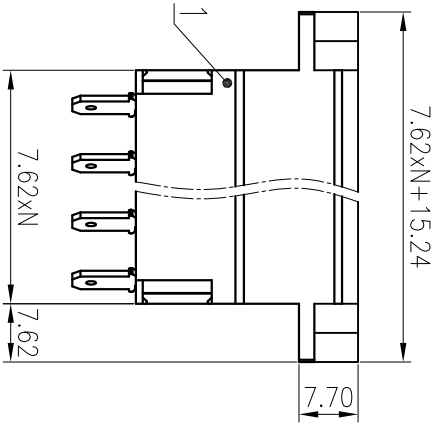
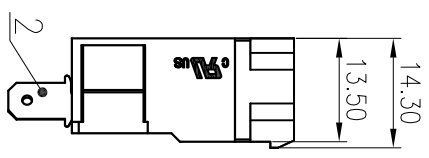


公差 (mm)		公差 (mm)		公差 (mm)		公差 (mm)		公差 (mm)		公差 (mm)		公差 (mm)		公差 (mm)		公差 (mm)		公差 (mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	>630	>800	>1000	>1250	>1600	>2000	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±3.00	±4.00	±5.00	±6.30	±8.00	±10.00	±12.50

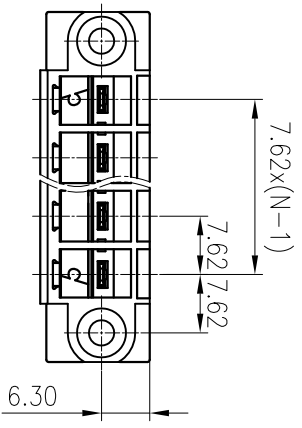


ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin	Copper	Sn Plated
1	Housing	PBT	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/30	300/30	/
IEC 标准/IEC Standard:		/		
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/2		
额定电压/电流/Rated Voltage(V)/Current(A)		400/32		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		4.0		
螺丝扭矩/Torque Tightening(Nm/Lb.in)		/		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		/		
间距/Pitch(mm)/线数范围/Poles		7.62/02~12P		
剥线长度/Stripping length(mm)		/		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		
标准颜色编号/Standard color number:		/		
PANTONE / RAL		/		

MATERIAL: /		SURFACE: /	
MAT NO.: /		/	
STATUS: /		/	
APPD: LanCH2020.04.02		NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
CHKD: GongyYZ2020.04.02		DRAWING NO.: 10001680	
DRFT: ZhuYP 2020.03.26		TYPE: CUSTOMER DRAWING	
/		SCALE: 1:1	
/		SHEET 1/1	
/		REV TO	

REV	ECN	DESCRIPTION	DRFT	DATE

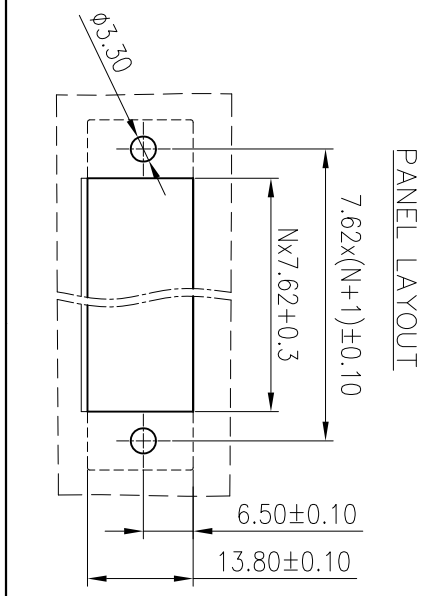

PANEL LAYOUT