
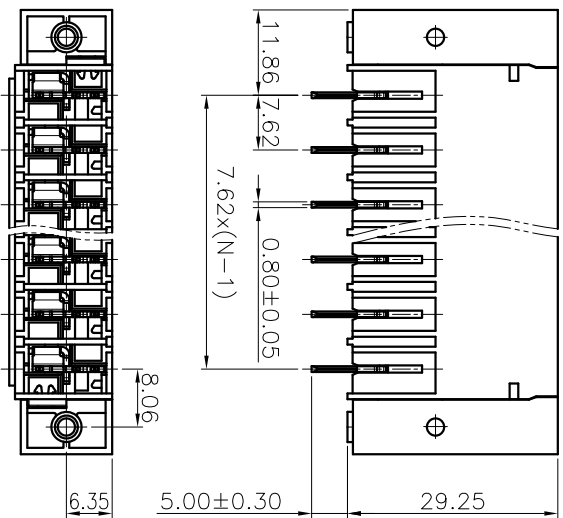
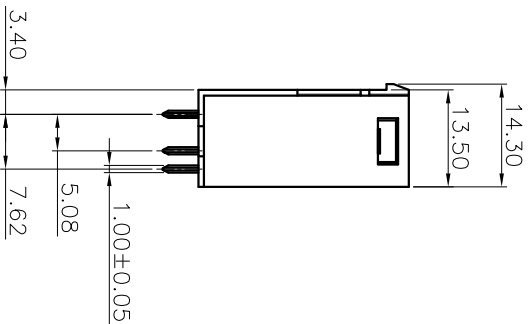
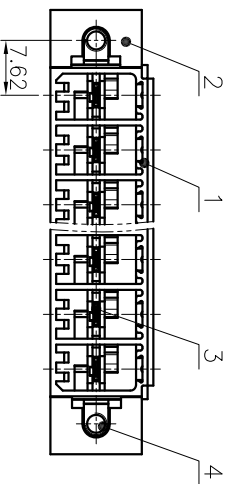


PCB LAYOUT

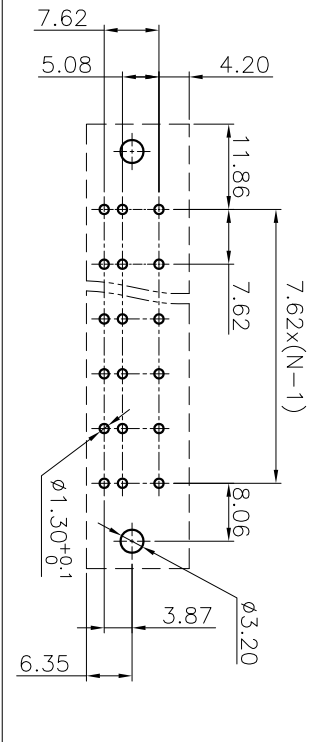

公差/General		公差/General		公差/General		公差/General		公差/General		公差/General		公差/General		公差/General	
0	>3	>5	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10	∅
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	0.1/10	∅
H0.12	F0.18	F0.22	F0.26	F0.31	F0.37	F0.57	F0.80	F0.93	F1.05	F1.15	F1.60	F2.20	F2.50	F2	∅

ITEM	NAME OF PART	MATERIAL	NOTES
4	Nut	Steel	M3/zn plated
3	Pin header	Copper	Sn plated
2	Housing 2	PA66	UL94V-0
1	Housing 1	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	300/41	300/41	600/75
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级			
级/ Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	630/41	630/41	1000/41
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	6	6
可距/Pitch(mm)/线数范围/Poles	7.62/N=02~12P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

SURFACE: /

DEGSON 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: **5EDGVHM-7.62-XXP-1Y-00A(H)**

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE	TYPE	SCALE	REV	SHEET
1					A4	CUSTOMER DRAWING	1:1	TO-1	1/1