


公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>6	>18
~	~	~	~
3	6	10	18
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
0.1/10	~	~	~
~	~	~	~

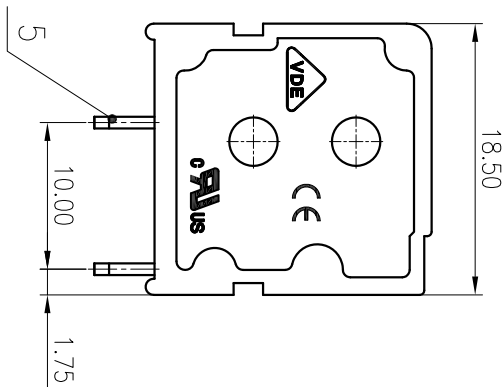

ITEM	NAME OF PART	MATERIAL	NOTES
6	Cover	PA66	UL94V-0
5	Pin header	Copper	Sn Plated
4	Block	Steel	Zn Plated
3	Cage	Steel	M2.5/Zn Plated
2	Screw	Steel	M2.5/Zn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:	/	/	/
IEC 类别/Overvoltage Category/污染等级	III/3	III/2	II/2
级/ Pollution Degree	/	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	250/24	/	/
工频耐压/Withstanding voltage(V/1Min)	AC2000	/	/
螺丝扭矩/Torque Tightening(N·m/Lb·in)	M2.5, 0.4/3.54	/	/
线缆范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.5~2.5/30~12	/	/
可抽/Pitch(mm)/线数范围/Poles	5.0/N=01~24P	/	/
剥线长度/Stripping length(mm)	12~13	/	/
使用温度范围/Operating temperature(°C)	-40~+105	/	/
符合RoHS环保要求/Conform to RoHS	Yes	/	/

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: Ljn CHH 2020.05.14 NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

CHKD: YU JZh 2020.05.14

DRAFT: Lj Zh 2020.05.14 DRAWING NO.: 10002085

TYPE: CUSTOMER DRAWING SCALE: 2:1

REV T0 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE