

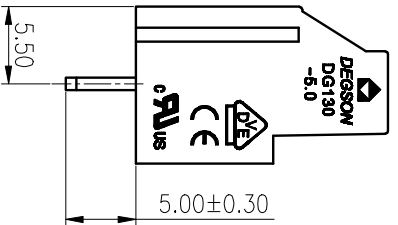
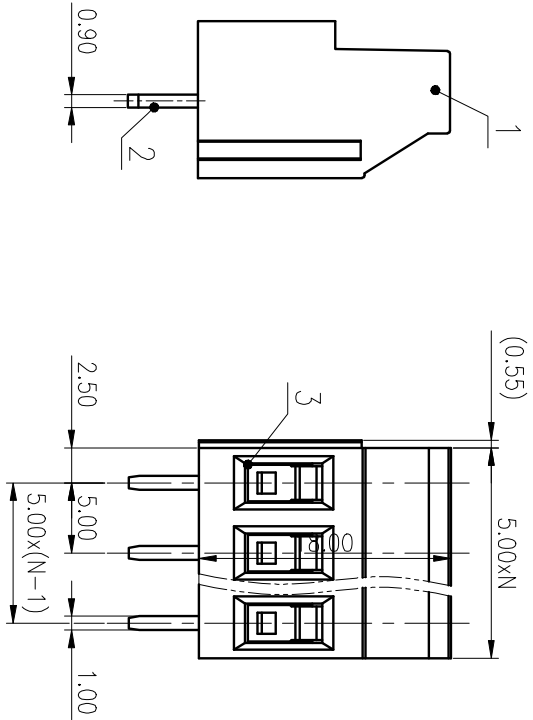


精度等级/General Tolerances(mm)		公差带										形位公差	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50



ITEM	NAME OF PART	MATERIAL	NOTES
4	Screw	Steel	M3/Zn Plated
3	Cage	Copper alloy	M3/Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:	III/2		
过压类别/Overvoltage Category/污染等级	III/2		
额定电压/电涌/Rated Voltage(V)/Current(A)	250/20		
工频耐压/Withstanding voltage(V/1Min)	AC2000		
拧紧扭矩/Torque Tightening(N·m/Lb.in)	M3: 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.5~2.5/26~12		
间距/Pitch(mm)/线数范围/Poles	5.00/N=2~24P		
剥线长度/Stripping length(mm)	8~9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		



MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
APPD: LanCH	2020.03.19	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
CHKD: YUJZ	2020.03.19		DG130-5.0-XXP-1Y-00A(H)
DRT: BqYH	2020.03.19	DRAWING NO.:	10001556
REV	ECN	DESCRIPTION	DRAFT
DATE	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET 1/1

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

DG130-5.0-XXP-1Y-00A(H)

10001556