


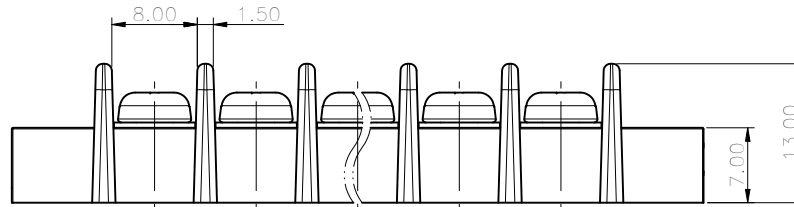


公差/General tolerances (mm)											D 0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~ 3	~ 6	~ 10	~ 18	~ 30	~ 50	~ 80	~ 120	~ 180	~ 250	~ 315	~ 400	~ 500	~ >500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

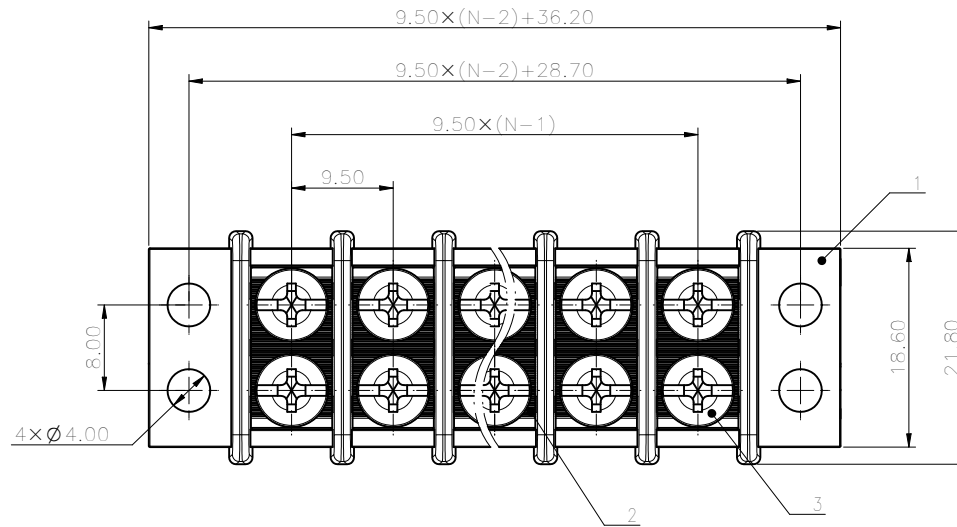

Note: The A&Z(H) in the name means: A(H) and Z(H).

3	Screw	Steel	Ni Plated
2	Clamp	Copper alloy	Sn Plated
1	Housing	PC	UL94V-2
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/20	/	/
IEC 标准/IEC Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)	450/32		
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3.5 0.8/7.08		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	22-12 / 4.0		
间距/Pitch(mm)/线数范围/Poles	9.50/N=02-24P		
剥线长度/Stripping length(mm)	7-8		
使用温度范围/Operating temperature(°C)	-40~+80		
符合RoHS环保要求/Conform to RoHS	Yes		

DEGSON MATERIAL: SURFACE/COLOR: MAT NO./REV: - / 00 MAT STATUS: 批量

APPD: 蓝美凡 2023.02.20 NAME: DG49-A-XXP-1Y-00A&Z(H)

CHKD: 曹利彬 2023.02.20

DRAFT: 姜民洁 2023.02.20

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200071909	CUSTOMER DRAWING	已发布	2:1	1/1

REV	ECN	DESCRIPTION	DRAFT	DATE
00				

Transfer or duplication of this document as well as the utilization or reproduction of its contents without the written permission of DEGSON is prohibited. All rights reserved for patent. 复制或再行发行本文件以及未经许可擅自使用本文件内容均属于侵权行为。如有侵权，本公司保留追究法律责任的权利。 版权所有，侵权必究。