
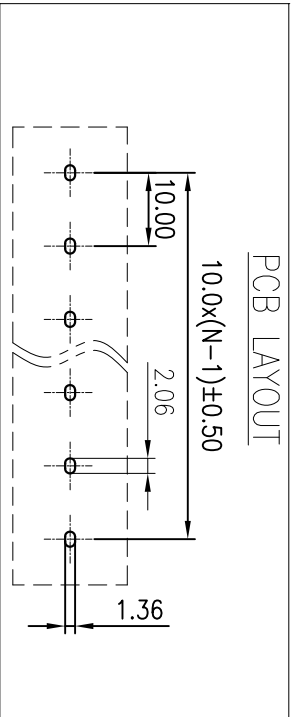

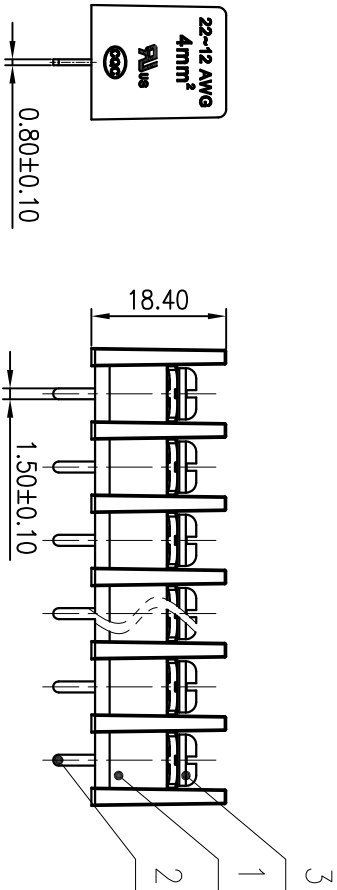


公差/General Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2
	~	~	~	~	~	~	~	~	~	~	~	~	~	∅

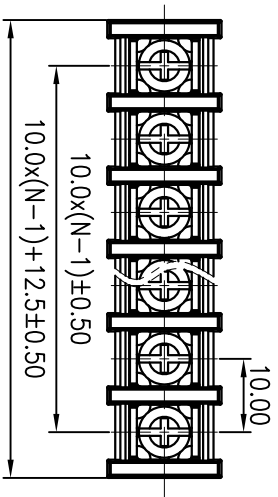

3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/电流/Rated Voltage(V)/Current(A) 300/20/300/20/300/10			
EC 标准/IEC Standard: 300/20/300/20/300/10			
过压类别/Overvoltage Category/污染等级 III/3 III/2 II/2			
额定电压/电流/Rated Voltage(V)/Current(A) 500/32 600/32 1000/32			
额定脉冲电压(kV)/Rate Impulse Voltage(kV) 4 6 6			
扭矩/扭力/Torque Tightening(N·m/Lb·in) M4, 1.2/10.53			
线径范围(线径)/Wire Range(flexible)(AWG) 22~12			
间距/Pitch(mm)/线数范围/Poles 10.00/N=02~26P			
剥线长度/Stripping length(mm) 9			
使用温度范围/Operating temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: WSJ 11/03/03"

DRAWING NO.: DG55C-C01

TYPE: CUSTOMER DRAWING

PCB LAYOUT

10.0x(N-1)±0.50

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	SCALE: 1:1	REV
							T5
							1/1