
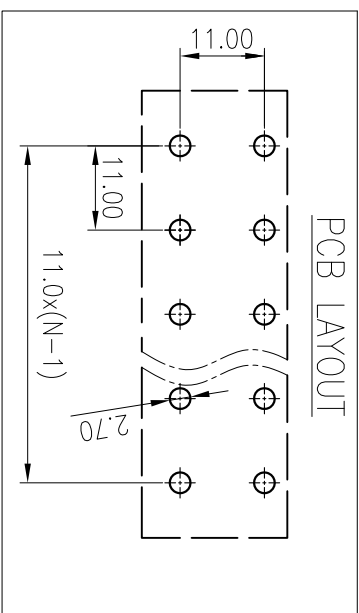
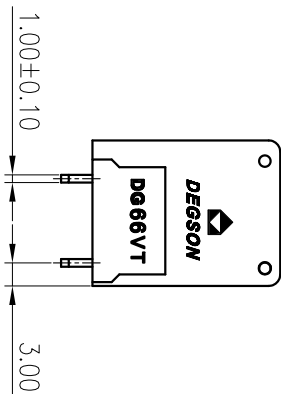
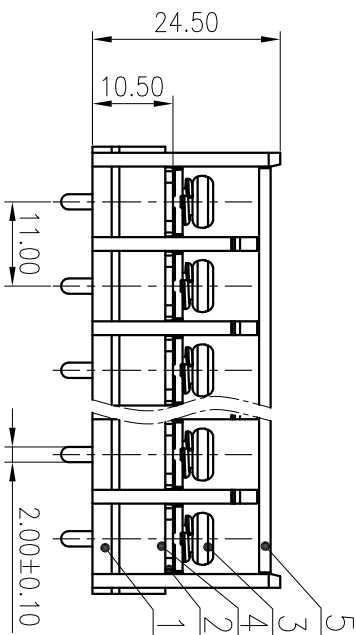



公差/General tolerances(mm)		0.1/10
0	>3	~
~	>6	~
~	>10	~
~	>18	~
~	>30	~
~	>50	~
~	>80	~
~	>120	~
~	>180	~
~	>250	~
~	>315	~
~	>400	~
~	>500	~
~	>500	~
±0.12	±0.18	±0.22
±0.26	±0.31	±0.37
±0.57	±0.57	±0.80
±0.93	±1.05	±1.15
±1.60	±2.20	±2.50
±2		±2

(Without Cover)

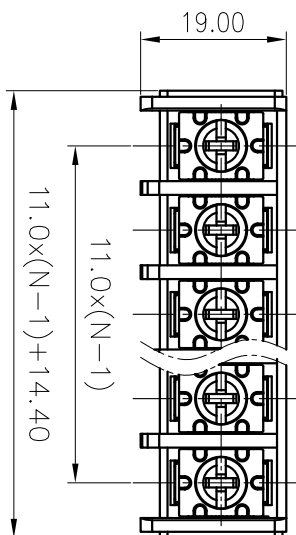

ITEM	NAME OF PART	MATERIAL	NOTES
5	Cover	PC	UL94V-2
4	Nut	Steel	M4/Zn Plated
3	Screw	Steel	M4/Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/40	300/4	600/5
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	/	/
螺丝扭矩/Torque Tightening(Lb.in)	M4, 15		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)	18~8		
间距/Pitch(mm)/线数范围/Poles	11.0/N=02~12P		
剥线长度/Stripping length(mm)	9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG66VT-XXP-1Y-50A(H)

MAT NO.:	/	DRAWING NO.:	DG66VT-C02	REV	T0
STATUS:	/	DRFT: Cen/MZ	2020.05.28	SCALE: 1:1	SHEET 1/1
APPD:		TYPE: CUSTOMER DRAWING			
CHKD:					

REV	ECN	DESCRIPTION	DRFT	DATE