
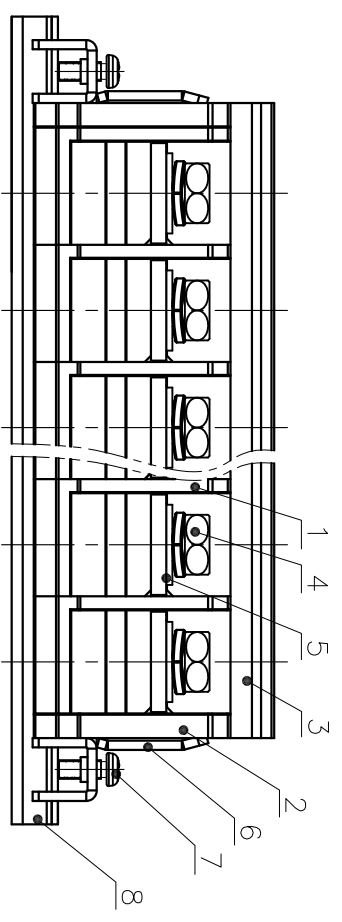
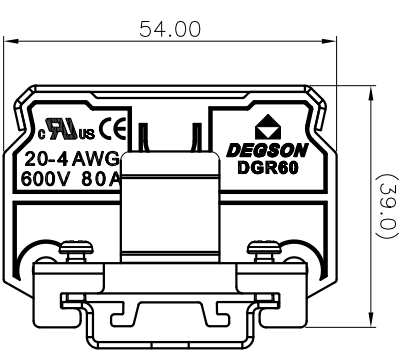


未注公差/General tolerances(mm)		
0	>3	0.1/10
~	>6	~
3	~ 6	±2
~	>10	~
6	~ 10	~
~	>18	~
10	~ 18	~
~	>30	~
18	~ 30	~
~	>50	~
30	~ 50	~
~	>80	~
50	~ 80	~
~	>120	~
80	~ 120	~
~	>180	~
120	~ 180	~
~	>250	~
180	~ 250	~
~	>315	~
250	~ 315	~
~	>400	~
315	~ 400	~
~	>500	~
400	~ 500	~
±0.12	±0.18	±2.50
±0.22	±0.26	±2.20
±0.31	±0.37	±2.50
±0.57	±0.80	±2.50
±0.93	±1.05	±2.50
±1.15	±1.60	±2.50
±2.20	±2.20	±2.50

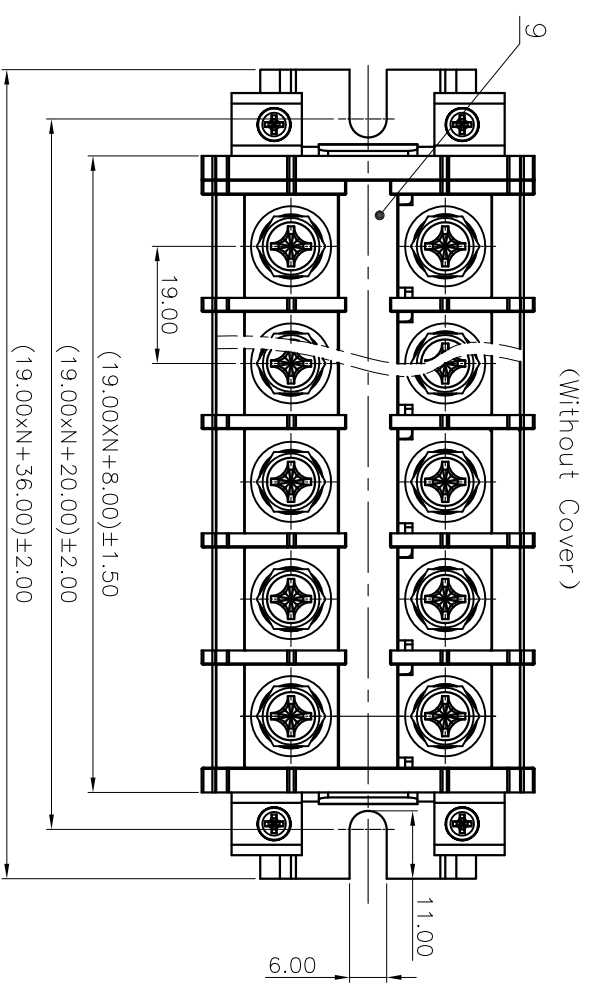

9	Tag	PVC	UL94V-0
8	Tramroad	Steel	Zn Plated
7	Screw2	Steel	M3/Zn Plated
6	Fastener	Steel	Zn Plated
5	Current carrier	Copper alloy	Ni Plated
4	Screw1	Steel	M6/Zn Plated
3	Cover	PC	UL94V-2
2	Housing2	PC	UL94V-0
1	Housing1	PC	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/电流/Rated Voltage(V)/Current(A) 600/80 600/80 600/5			
IEC 标准/IEC Standard: III/3 III/2 II/2			
过压类别/Overvoltage Category/污染等级 III/3 III/2 II/2			
额定电压/电流/Rated Voltage(V)/Current(A) 800/101 1000/101 1000/101			
拧紧扭矩/Torque Tightening(N.m/Lb.in) M6, 4.4/40.0			
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG) 0.5~25/20~4			
间距/Pitch(mm)/线数范围/Poles 19.0/N=XXP			
使用温度范围/Operating temperature(°C) -40~+125			
符合RoHS环保要求/Conform to RoHS Yes			

MATERIAL: /
SURFACE: /

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: **DGR60-XXP-1Y-00A(H)**

DRAWING NO.: DGR60-C01

TYPE: CUSTOMER DRAWING

SCALE: 1:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	SCALE: 1:1	SHEET 1/1

D C B A

1 2 3 4 5 6