

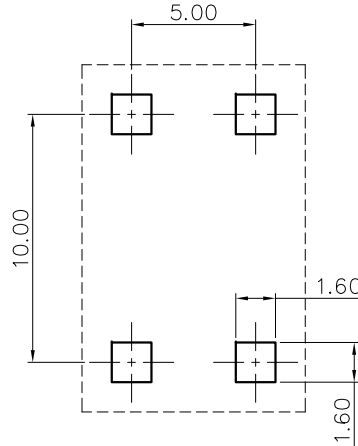



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

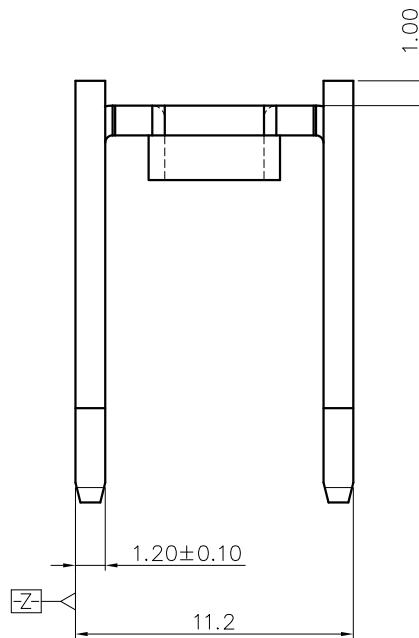

PCB LAYOUT

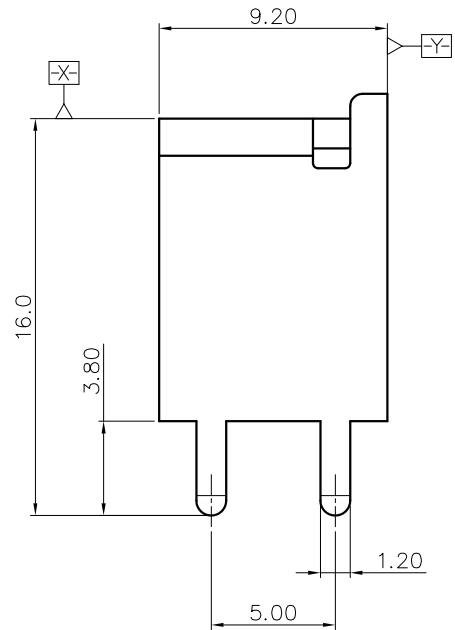

NOTES:

- Rated Current : 50A
- Torque Value : M4 , 12Lb.in
- Dimension shall be interpreted per ASME Y14.5-2009
- UNDIMENSIONED TOLERANCES:

Pitch Range In mm		Nominal Dimension Range In mm				Tolerances		
TO	Over TO	TO	Over TO	TO	Over TO	0.1/10	∠	
6	10	10	24	30	60	100	150	±2*
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	

- RoHS Compliance

K50 -00A (H)
 (Series No.) (RoHS) (Standard)

1	Pin header	Copper alloy	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES

DETACHED LISTS	PART NO.:	/			
	APPD:	NAME:			
	CHKD:	K50-00A(H)			
	DRFT: ZX 11/07/15"	TITLE: CUSTOMER DRAWING	REV	TO	
THIRD ANGLE PROJECTION		DRAWING NO.:	K50-C01	SHEET	1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE	1:1