
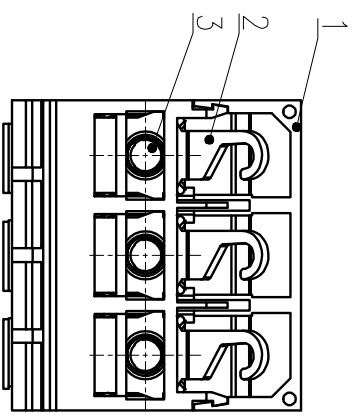

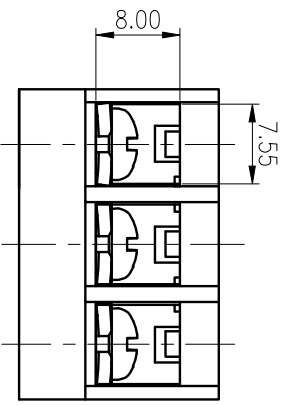
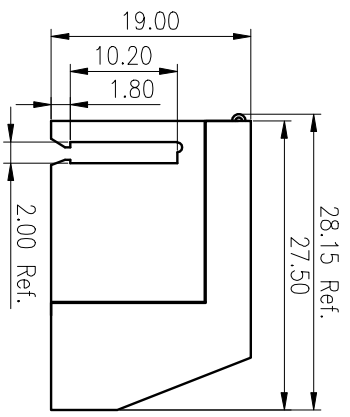


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

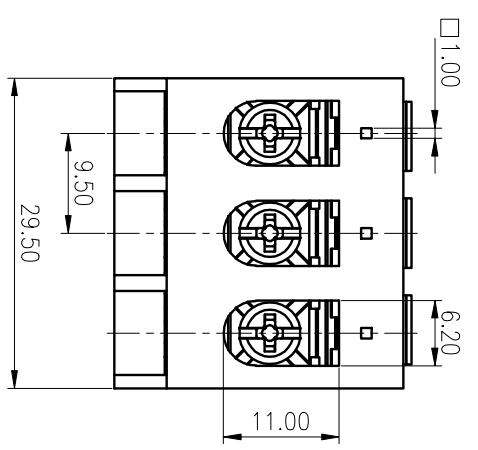

ITEM	NAME OF PART	MATERIAL	NOTES
3	Screw	Steel	M3.5/Ni Plated
2	Pin header	Copper	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准 /UL Standard:		B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)		600/20	600/20	600/5
IEC 标准 /IEC Standard:				
过压类别/Overvoltage Category/污秽等级		III/2		
额定电压/电涌/Rated Voltage(V)/Current(A)		250/24		
工频耐受电压/Withstanding voltage		AC2000V/1Min		
螺栓扭矩/Torque Tightening(N·m/Lb·in)		M3.5: 0.8/7.02		
线芯范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)		0.5~2.5/20~12		
间距/Pitch(mm)/线芯范围/Poles		9.5/03P		
剥线长度/Stripping length(mm)		9		
使用温度范围/Operating Temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		
标准颜色编号/Standard color number: RAL		RAL 2000		

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: /
 NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**

CHKD: /
 DRAFT: CenWZ 2020.05.18
 DRAWING NO.: TSB2.5-C07
 TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	SCALE: 1.5:1 SHEET