






公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

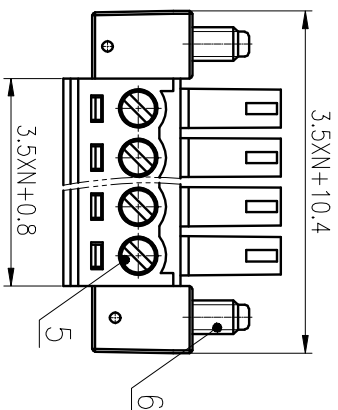

Approval mark can be printed on left and right end both



ITEM	NAME OF PART	MATERIAL	NOTES
6	Screw 2	Steel	M2.5/Zn Plated
5	Screw 1	Steel	M2/Zn Plated
4	Cage	Copper Alloy	M2/IN Plated
3	Clamp	Copper Alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准 /UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/8	/	300/8

IEC 标准 /IEC Standard:	II/2
过压类别/Overvoltage Category/污染等级/Pollution Degree	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	250/7
额定冲击电压(kV)/Rate Impulse Voltage(kV)	2.5
额定扭矩/紧固力矩/Torque Tightening(N·m/Lb·in)	M2, 0.2/1.77
线芯范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.5~1.5/28~16
间距/Pitch(mm)/线数范围/Poles	3.5/N=02~24P
剥线长度/Stripping length(mm)	6~7
使用温度范围/Operating temperature(°C)	-40~+105
符合RoHS要求/Conform to RoHS	Yes

MATERIAL: /		SURFACE: /	
MAT NO.:	/		
STATUS:	/		

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
宁波高松电子有限公司

NAME: **15EDGKM-3.5-XXP-1Y-00AH**

APPD: LANCH 2020.05.27	NAME:	
CHKD: YUJZ 2020.05.27	DRAWING NO.:	15EDGKM-3.5-C01
DRT: FRZ 2016.01.26	TYPE:	CUSTOMER DRAWING
REV	ECN	DESCRIPTION
DRAFT	DATE	
SIZE: A4	SCALE: 2:1	SHEET 1/1