

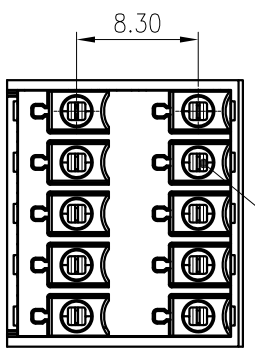
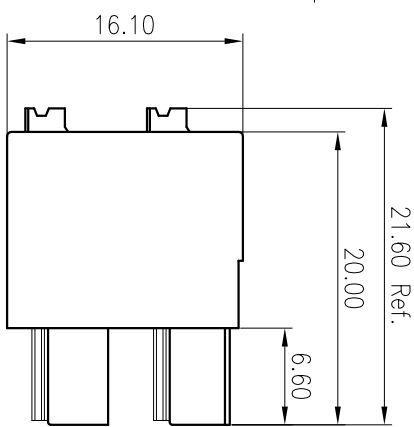



公差表/General tolerances(mm)		0.1/10
0	>3	~
~	>5	~
3	~	~
6	10	~
18	30	~
30	50	~
50	80	~
80	120	~
120	180	~
180	250	~
250	315	~
315	400	~
400	500	~
500	>500	~
H0.12 H0.18 H0.22 H0.26 H0.31 H0.37 H0.57 H0.80 H0.93 H1.05 H1.15 H1.60 H2.20 H2.50		±0.10
		±0.07

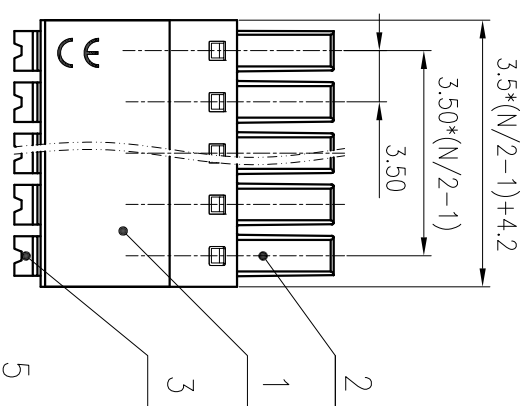

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	/	/
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污秽等级/ Pollution Degree	II/2	III/2	III/3
额定电压/电流/Rated Voltage(V)/Current(A)	320/8	160/8	160/8
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
绞径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	2~16/0.2~1.0&1.5mm ² (Sol)		
间距/Pitch(mm)/绞数范围/Poles	3.50/N=04~48P		
剥线长度/Stripping length(mm)	8-9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: /
SURFACE: /

MAT NO.: /
STATUS: /
APPD: LI GL 2020.05.28
CHKD: Mao J 2020.05.28
DRAFT: Wang LX 2020.05.28

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: 15EDGKNHC-3.5-C01
TYPE: CUSTOMER DRAWING
SCALE: 2:1 SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES
5	Spring	Stainless steel	
4	Clamp	Copper alloy	Sn plated
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

REV	EON	DESCRIPTION	DRAFT	DATE
1				

REV	EON	DESCRIPTION	DRAFT	DATE
1				