
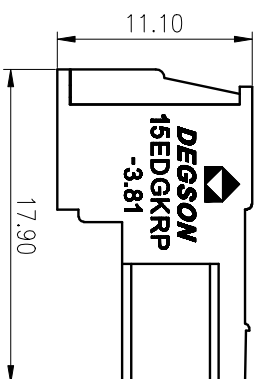
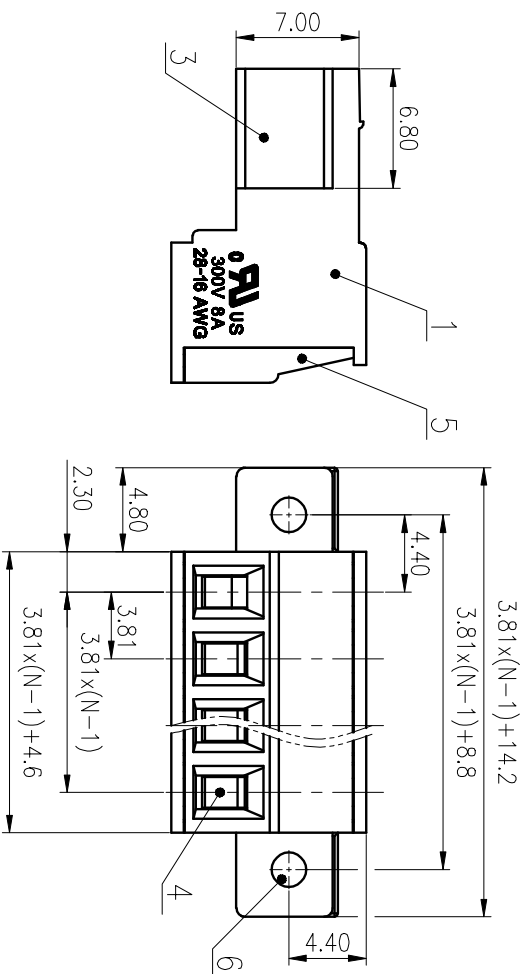


精度等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										形位公差/Geometric Tolerances	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
3	6	10	18	30	50	80	120	180	250	315	400	500	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

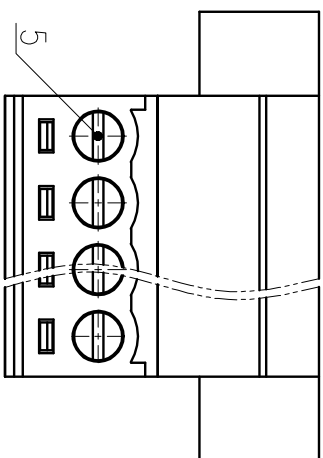

ITEM	NAME OF PART	MATERIAL	NOTES
6	Screw cap	Copper alloy	M2.5
5	Screw	Steel	M2/Zn plated
4	Cage	Copper alloy	M2/Ni plated
3	Pin	Copper	Sn plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准 / UL Standard:	B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	300/8	/	/
IEC 标准 / IEC Standard:	/	/	/
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	/	/	II/2
额定电压/电涌 / Rated Voltage(V)/Current(A)	/	/	250/7
额定电涌电压(KV) / Rate Impulse Voltage(KV)	/	/	2.5
螺栓扭矩 / Torque Tightening(N·m / Lb·in)	M2, 0.2/1.77		
线在槽内(螺栓和球头) / Wire Range(rigid and flexible)(mm ² / AWG)	0.2~1.5/28~16		
间距 / Pitch(mm) / 线数范围 / Poles	3.81 / N=02~16P		
剥线长度 / Stripping length(mm)	6~7		
使用温度范围 / Operating Temperature(°C)	-40~+105		
符合 RoHS 环保要求 / Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: Li GL 2020.06.18
 CHKD: Mao J 2020.06.18
 DFT: ZhengQG 2020.06.18

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
15EDGKRP-3.81-XXP-1Y-00A(H)

DRAWING NO.: 15EDGKRP-3.81-C01

TYPE: CUSTOMER DRAWING SCALE: 2.5:1 SHEET 1/1

REV ECN DESCRIPTION DRAFT DATE

SIZE: A4 (mm/inch) TYPE: CUSTOMER DRAWING SCALE: 2.5:1 SHEET 1/1

A B C D

1 2 3 4 5 6