

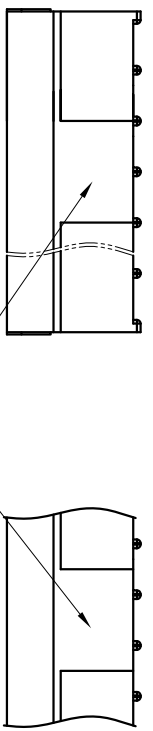
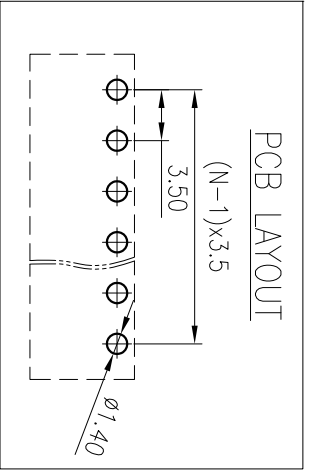

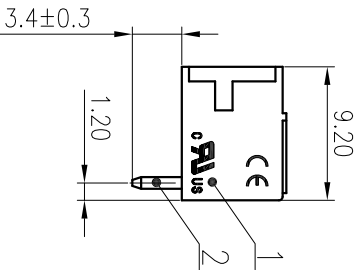


未注公差/General tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0	
~	~	~	~	~	~	~	~	~	~	~	~	~		
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2

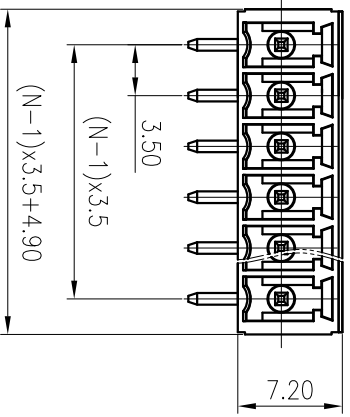

The pad is positioned centrally above the existing positions.



2	Pin	Copper	Sn Plated
1	Housing	LCP	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard: B C D			
额定电压/电流/Rated Voltage(V)/Current(A) 300/8 / / /			
EC 标准/IEC Standard: / / /			
过压类别/Overvoltage Category/污染等级 III/3 III/2 II/2			
额定电压/电流/Rated Voltage(V)/Current(A) / / 250/8 / /			
额定脉冲电压(KV)/Rate Impulse Voltage(KV) / / 2.5 / /			
间距/Pitch(mm)/线数范围/Poles 3.5/N=02~12P / /			
使用温度范围/Operating temperature(°C) -40~+130 / /			
符合RoHS要求/Conform to RoHS Yes			

MATERIAL: /	SURFACE: /
MAT NO.: /	
STATUS: /	
APPD: /	
CHKD: /	
NAME: DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	

DRFT: Cen/MZ 2020.06.17	DRAWING NO.: 15EDGRC-THR-3.5-C01	REV	TO
CHKD: /	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET 1/1
DRFT: /	DATE: /	REV: /	TO: /
DRFT: /	DATE: /	REV: /	TO: /
DRFT: /	DATE: /	REV: /	TO: /
DRFT: /	DATE: /	REV: /	TO: /

REV	ECN	DESCRIPTION	DRFT	DATE

1 2 3 4 5 6

A B C D