

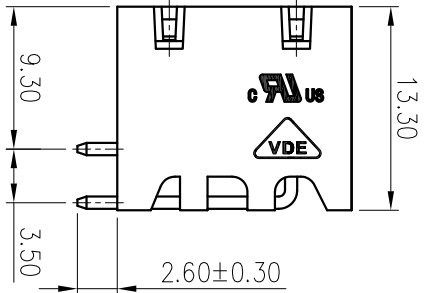
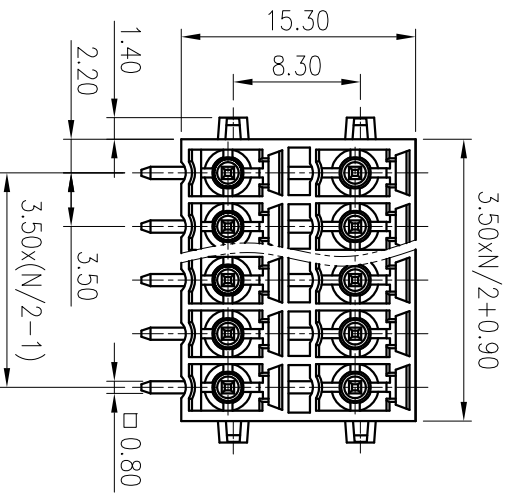
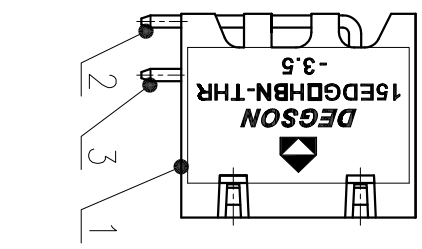



公差 (General Tolerances)(mm)		0.1/10
0	>3	±2.50
~	>6	±2.50
~	>10	±2.50
~	>18	±2.50
~	>30	±2.50
~	>50	±2.50
~	>80	±2.50
~	>120	±2.50
~	>180	±2.50
~	>250	±2.50
~	>315	±2.50
~	>400	±2.50
~	>500	±2.50
±0.12	±0.18	±2.50
±0.22	±0.26	±2.50
±0.31	±0.37	±2.50
±0.57	±0.80	±2.50
±0.93	±1.05	±2.50
±1.15	±1.60	±2.50
±2.20	±2.50	±2.50
±Z		±Z



文 管 中 心
研 发 专 用
2020.06.02
(仅限内部使用, 对外无效)

PCB LAYOUT

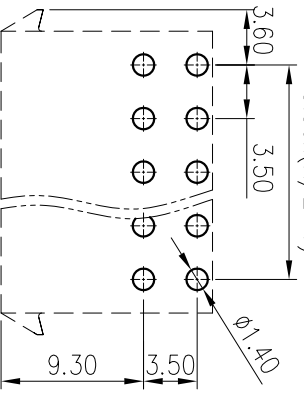

3	Pin 2	Copper	Sn plated
2	Pin 1	Copper	Sn plated
1	Housing	Thermoplastic	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/电流/Rated Voltage(V)/Current(A): 300/8 / / /			
EC 标准/IEC Standard: / / /			
过压类别/Overvoltage Category/污染等级/Pollution Degree: III/3 III/2 II/2			
额定电压/电流/Rated Voltage(V)/Current(A): / / / 250/8			
额定脉冲电压(KV)/Rate Impulse Voltage(KV): / / / 2.5			
间距/Pitch(mm)/线数范围/Poles: 3.50/N=04~48P			
使用温度范围/Operating Temperature(°C): -40~+130			
符合RoHS环保要求/Conform to RoHS: Yes			

SURFACE:

MATERIAL:

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD



MAT NO.:	/
STATUS:	/
APPD:lan	CHH 2020.06.02
CHKD:YU	JZh 2020.06.02
DRFT:	WL 2015.09.16
DRFT	Wu LF
DATE	2020.06.02
DESCRIPTION	Change the frame
ECN	
REV	(T1)

SIZE: A4	SIZE: A4
SCALE: 2:1	SCALE: 2:1
SHEET 1/1	SHEET 1/1
TYPE: CUSTOMER DRAWING	TYPE: CUSTOMER DRAWING
NAME: 15EDGRHBN-THR-3.5-XXP-1Y-10A(H)	NAME: 15EDGRHBN-THR-3.5-XXP-1Y-10A(H)
DRAWING NO.: 15EDGRHBN-THR-3.5-003	DRAWING NO.: 15EDGRHBN-THR-3.5-003
REV T1	REV T1