

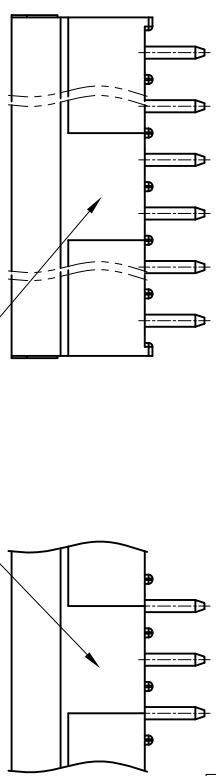
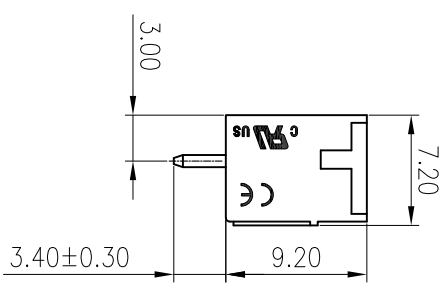
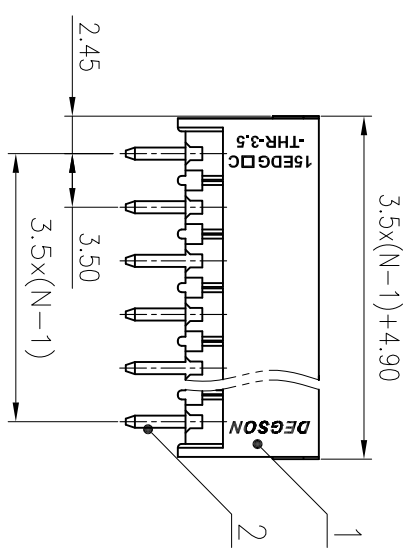



未注公差/General tolerances(mm)												
0	>3	>5	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400
~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500
±0.17	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20
												±2.50
												0.1/10
												±7°



The pad is positioned centrally above the existing positions.



PCB LAYOUT

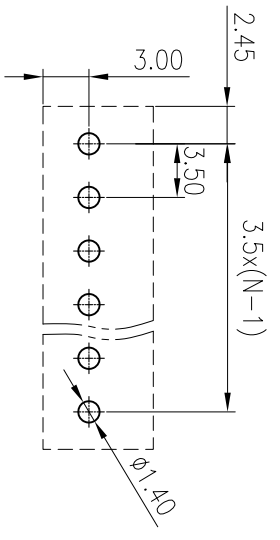

文
研
管
发
中
心
2020.05.19
(仅限内部使用, 对外无效)

2	Pin	Copper	Sn Plated	
1	Housing	Thermoplastic	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:	B	C	D	
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	/	/	
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		II/2		
额定电压/电流/Rated Voltage(V)/Current(A)		250/8		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		2.5		
间距/Pitch(mm)/线数范围/Poles		3.5/N=02~12P		
使用温度范围/Operating temperature(°C)		-40~+130		
符合RoHS环保要求/Conform to RoHS		Yes		

MATERIAL: /		SURFACE: /	
MAT NO.:	/		
STATUS:	/		
APPD: Lan	CHH 2020.05.19	NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
CHKD: Yu JZh	2020.05.19	DRAWING NO.: 15EDGVC-THR-3.5-001	
DRFT: WL	2015.11.19	TYPE: CUSTOMER DRAWING	
SIZE: A4	(mm)	SCALE: 2:1	SHEET 1/1
REV	ECN	DESCRIPTION	DRFT DATE
(T1)		Drawing Update	2020.05.19