
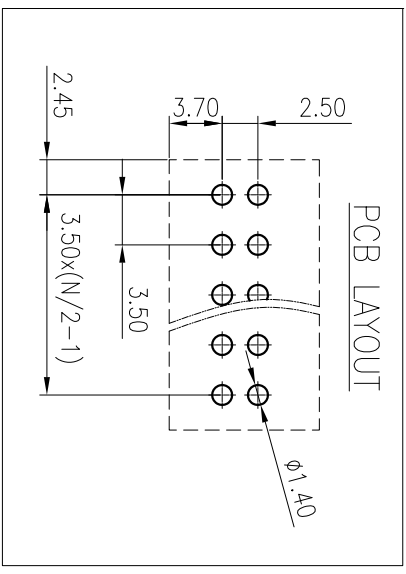

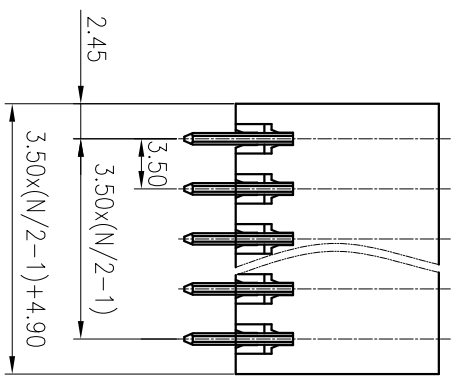
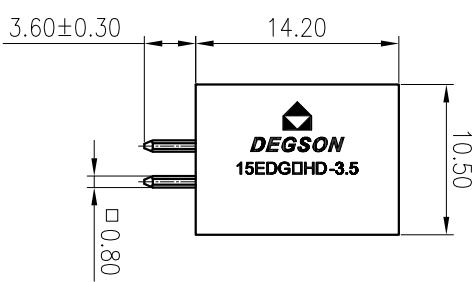


公差/General Tolerances(mm)	
0	>3
~	>6
~	>10
~	>18
~	>30
~	>50
~	>80
~	>120
~	>180
~	>250
~	>315
~	>400
~	>500
~	>500
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±0.93	±1.05
±1.15	±1.60
±2.20	±2.50
0.1/1.0	±Z



2	Pin	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准 /UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	150/10	50/10	/
IEC 标准 /IEC Standard:			
过压类别 /Overvoltage Category/污染等级 /Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	80/10	125/10	250/10
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
扭矩/Torque	/		
拧紧范围 (硬线和软线) /Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	/		
间距/Pitch(mm) /线数范围 /Poles	3.50/N=04~48P		
剥线长度/Stripping length(mm)	/		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号 /Standard color number:	/		
PANTONE / PAl	/		

MATERIAL: / SURFACE: /

MAT NO.: /  
 STATUS: /  
 APPD: LiGL 2020.06.22  
 CHKD: MaoJ 2020.06.22  
 DRAFT: WangY2 2020.06.22

NAME: **DEGSON**® NINGBO DEGSON ELECTRICAL CO., LTD  
**15EDGVHD-3.5-XXP-14-00A(H)**

DRAWING NO.: 15EDGVHD-3.5-C01  
 TYPE: CUSTOMER DRAWING  
 SCALE: 2:1  
 SHEET 1/1

REV	ECN	DESCRIPTION	DRT	DATE