
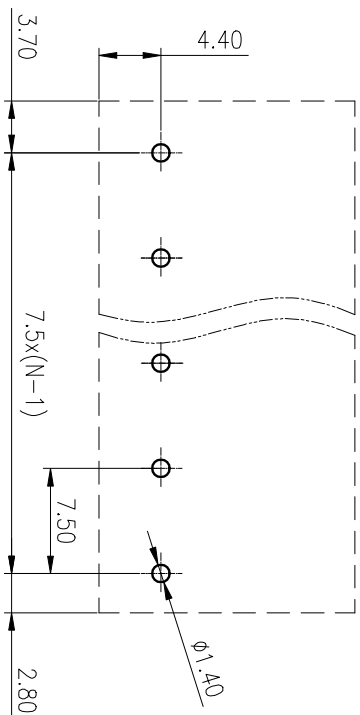
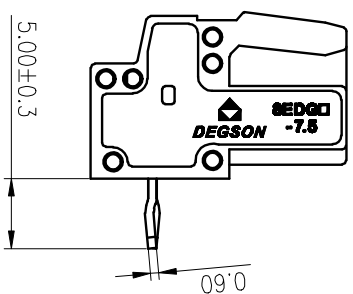


The first pin will bulge to the up

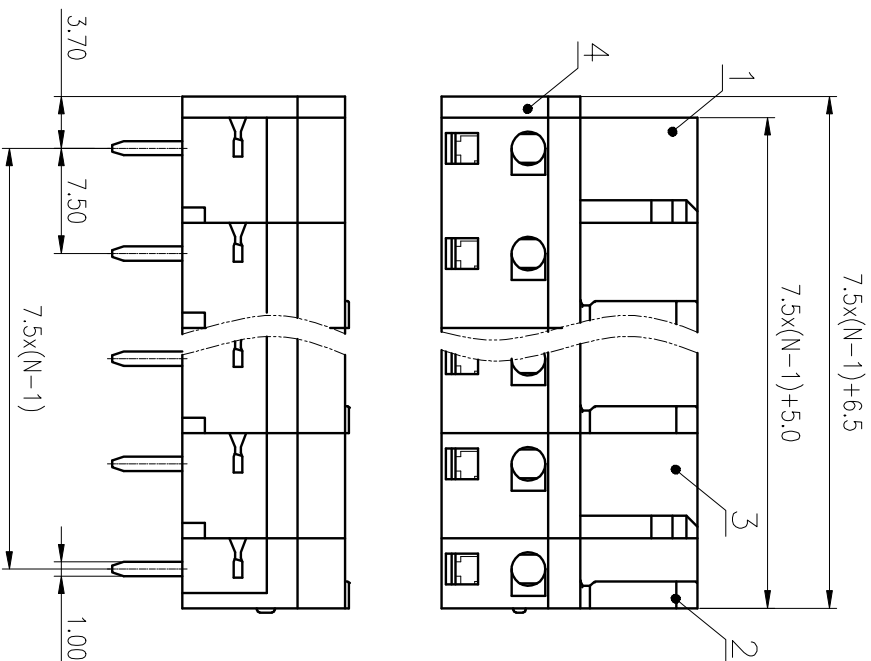

公差等级/General	Tolerances(mm)											公差/General	
0	>.3	>.6	>.10	>.18	>.30	>.50	>.80	>.120	>.180	>.250	>.315	>.400	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
3	6	10	18	30	50	80	120	180	250	315	400	500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

Bending the pin-header after assembling

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing1	PA66	UL94V-0
2	Side Housing	PA66	UL94V-0
3	Housing2	PA66	UL94V-0
4	Cover	PA66	UL94V-0
5	Clamp	Copper alloy	Sn plated

UL 标准 / UL Standard:	B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准 / IEC Standard:			
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III/3	III/2	II/2
额定电压/电涌 / Rated Voltage(V)/Current(A)	320/20	/	/
额定脉冲电压 / Rate Impulse Voltage(KV)	4.0	/	/
额定电压/电涌 / Rated Voltage(V)/Current(A)			
使用温度范围 / Operating Temperature(°C)	-40~+105		
符合RoHS环保要求 / Conform to RoHS	Yes		
标准颜色编号 / Standard color number:	PANTONE 428C		
材料 / Material:	PANTONE / RAL		
表面处理 / SURFACE:	/		

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	/
CHKD:	/
NAME:	8EDGC-7.5-XXP-11-01A(H)
DRAWING NO.:	8EDGC-7.5-C02
TYPE:	CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				
5				
6				

SIZE: A4	SCALE: 2:1
TYPE: CUSTOMER DRAWING	SHEET 1/1

NINGBO DEGSON ELECTRICAL CO., LTD

8EDGC-7.5-XXP-11-01A(H)

DRFT: WangY1 2020.06.17

NINGBO DEGSON ELECTRICAL CO., LTD