

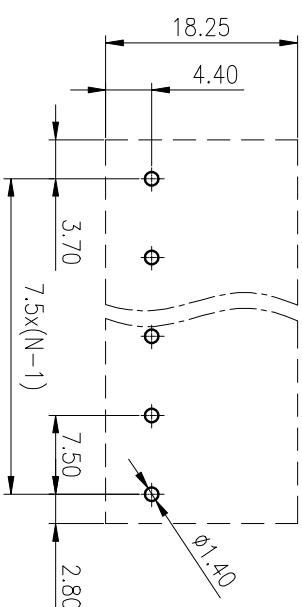


公差等级/General	General tolerances/(mm)										公差/General		
0	>.3	>.6	>.10	>.18	>.30	>.50	>.80	>.120	>.180	>.250	>.315	>.400	0.1/1.0
3	~	~	~	~	~	~	~	~	~	~	~	>.500	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±Z




PCB LAYOUT

Bending the pin-header after assembling

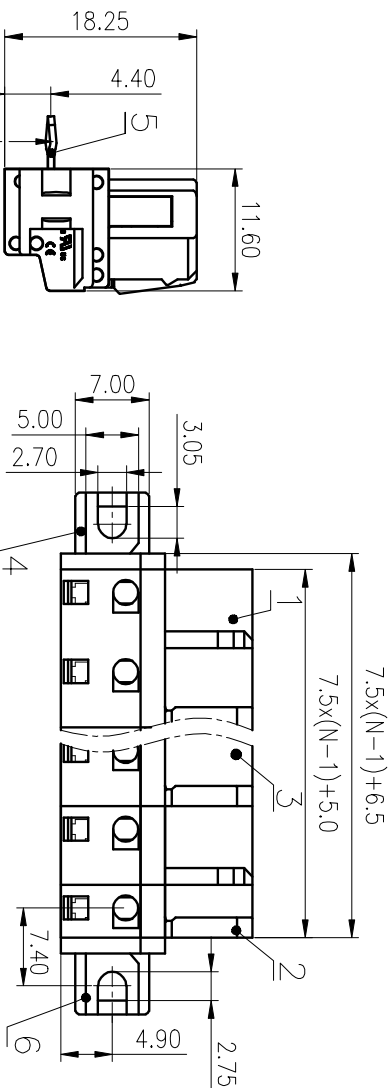

The first pin will bulge to the up

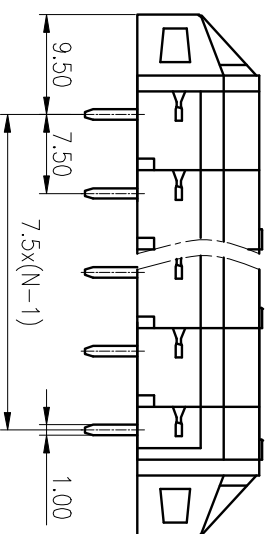

ITEM	NAME OF PART	MATERIAL	NOTES
6	Right housing	PA66	UL94V-0
5	Clamp	Copper alloy	Sn Plated
4	Left housing	PA66	UL94V-0
3	Housing2	PA66	UL94V-0
2	Side Housing1	PA66	UL94V-0
1	Housing1	PA66	UL94V-0

UL 标准 /UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准 /IEC Standard:			
过压类别 /Overvoltage Category/污染等级 /Pollution Degree	III/3	III/2	II/2
额定电压/电涌 /Rated Voltage(V)/Current(A)	320/20	/	/
额定脉冲电压 /Rate Impulse Voltage(KV)	4.0	/	/
线径范围(硬线和软线) /Wire Range(rigid and flexible)(mm² /AWG)	/		
间距 /Pitch(mm) /线数范围 /Poles	7.5 /N=02~12P		
剥线长度 /Stripping length(mm)	6~7		
使用温度范围 /Operating Temperature(°C)	-40~+105		
符合RoHS环保要求 /Conform to RoHS	Yes		
标准颜色编号 /Standard color number:	PANTONE 428C		
PANTONE / RAL	PANTONE 428C		

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAWING NO.: 8EDGCM-7.5-C02

DRAFT: WangY1 2020.06.19

TYPE: CUSTOMER DRAWING

NAME: **DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

8EDGCM-7.5-XXP-11-01A(H)

SCALE: 2:1

SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE

D

C

B

A

D

C

B

A

1

2

3

4

5

6