
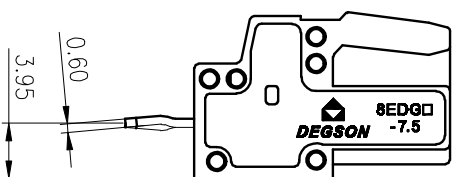
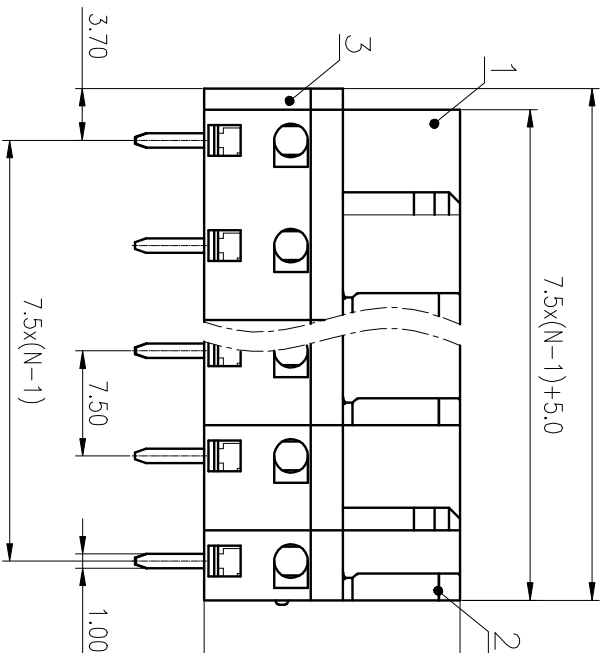
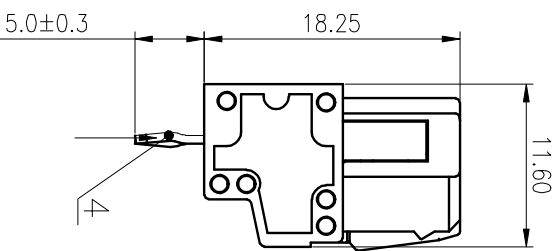
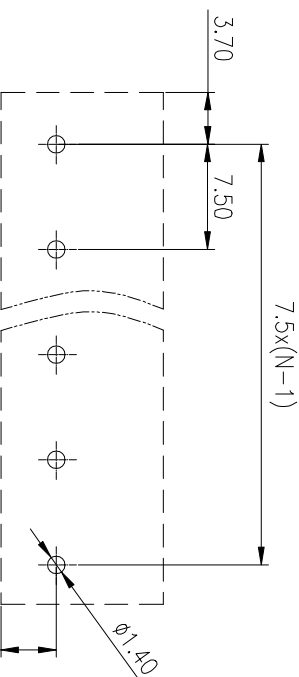


公差等级/General	Tolerances(mm)										公差等级/General		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50



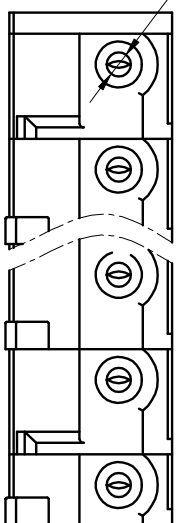


Bending the pin-header after assembling

ITEM	NAME OF PART	MATERIAL	NOTES
4	Clamp	Copper alloy	Sn plated
3	Cover	PA66	UL94V-0
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0

UL 标准 / UL Standard:	B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准 / IEC Standard:			
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III / 3	III / 2	II / 2
额定电压/电涌 / Rated Voltage(V)/Current(A)	320/20	/	/
额定电涌电压 / Rate Impulse Voltage(KV)	2.5	/	/
线径范围(硬线和软线) / Wire Range(rigid and flexible)(mm ² / AWG)	/		
间距 / Pitch(mm) / 线距范围 / Poles	7.5 / N = 02 ~ 12P		
剥线长度 / Stripping length(mm)	6-7		
使用温度范围 / Operating Temperature(°C)	-40 ~ +105		
符合 RoHS 环保要求 / Conform to RoHS	Yes		
标准颜色编号 / Standard color number:	PANTONE 428C		
PANTONE / RAL	PANTONE 428C		

The first pin will bulge to the left

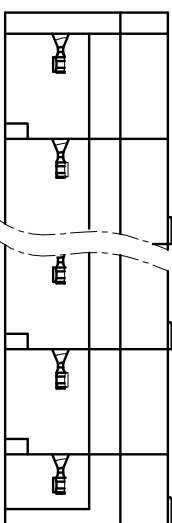

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
APPD:	/		
CHKD:	/		

8EDGD-7.5-XXP-11-01A(H)

DEGSON NINGBO DEGSON ELECTRICAL CO., LTD
宁波高松电子有限公司

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	REV	TO
1	2	3	4	5	6	1/1			