


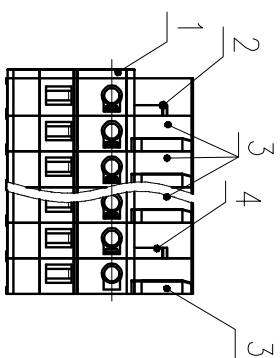



规格/General		公差/ tolerances(mm)										公差/General													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10 ±Z												
~	~	~	~	~	~	~	~	~	~	~	~	~													
3	6	10	18	30	50	80	120	180	250	315	400	500													
±0.12		±0.18		±0.22		±0.26		±0.31		±0.37		±0.57		±0.80		±1.05		±1.15		±1.60		±2.20		±2.50	

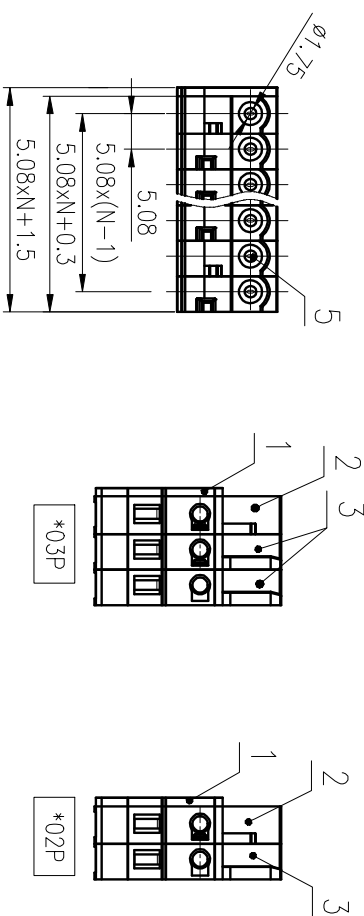

6	Spring	Stainless Steel	
5	Clamp	Copper alloy	
4	Housing2	PA66	
3	Housing1	PA66	
2	Side Housing	PA66	
1	Cover	PA66	
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 /UL Standard: B C D			
额定电压/电涌 /Rated Voltage(V)/Current(A) 300/151 150/151 300/710			
IEC 标准 /IEC Standard: B C D			
过压类别 /Overvoltage Category/污染等级 III/3 III/2 II/2			
额定电压/电涌 /Rated Voltage(V)/Current(A) 320/20 / /			
额定脉冲电压 (KV) /Rate Impulse Voltage(KV) 4 / /			
额定扭矩 /Torque Tightening(N.m/Lb.in) / /			
线径范围 (硬线和软线) /Wire Range(rigid and flexible)(mm² /AWG) 0.2~2.5 /22~14			
间距 /Pitch(mm) /线数范围 /Poles 5.08 /N=02~24P			
剥线长度 /Stripping length(mm) 9~10			
使用温度范围 /Operating Temperature(°C) -40~+105			
符合 RoHS 要求 /Conform to RoHS Yes			
标准颜色编号 /Standard color number: PANTONE 428C			
PANTONE /RAL			
SURFACE: /			

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	
CHKD:	
DRAFT: WangY1	2020.06.01
SIZE: A4	mm / inch
TYPE: CUSTOMER DRAWING	SCALE: 1:1
REV	T0
1/1	SHEET

DEGSON® 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD  
NAME: 8EDGK-5.08-XXP-11-1001A(H)

REV	ECN	DESCRIPTION	DRAFT	DATE
1	2	3	4	5

REV	ECN	DESCRIPTION	DRAFT	DATE
1	2	3	4	5