
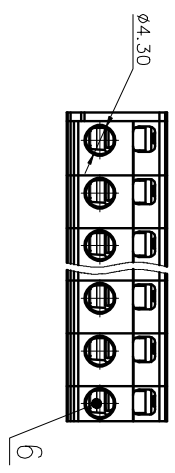

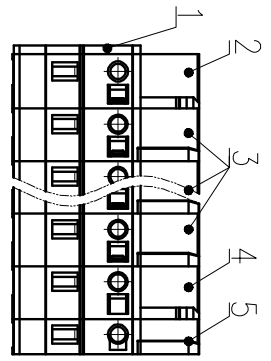

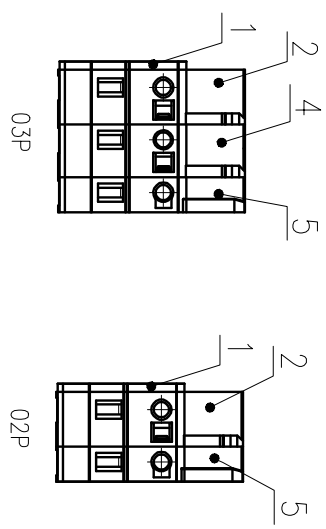


Pitch	Range	In	mm	Nominal	Dimension	Range	In	mm
Over	6	10	TO	Over	30	60	100	Over
TO	10	24	TO	TO	70	100	150	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2



ITEM	NAME OF PART	MATERIAL	NOTES
1	Cover	PA66	UL94V-0
2	Side housing 1	PA66	UL94V-0
3	Middle housing 1	PA66	UL94V-0
4	Middle housing 2	PA66	UL94V-0
5	Side housing 2	PA66	UL94V-0
6	Spring	Stainless steel	
7	Clamp	Copper alloy	Sn plated

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300	151	300/151
EC 标准/IEC Standard:	300	151	300/151
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	400/20	/	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	4	/	/
线芯范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/22~14		
剥线长度/Stripping length(mm)	7.50/N=02~12P		
使用温度范围/Operating temperature(°C)	9~10		
符合RoHS环保要求/Conform to RoHS	-40~+105		
标准颜色编号/Standard color number:	Yes		
PANTONE	428C		

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: /
 CHKD: /

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
8EDGKB-7.5-XXP-11-1001A(H)

DRAWING NO: 8EDGKB-7.5-1000-C02
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET: 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE

