
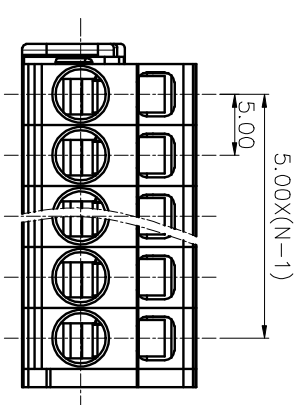

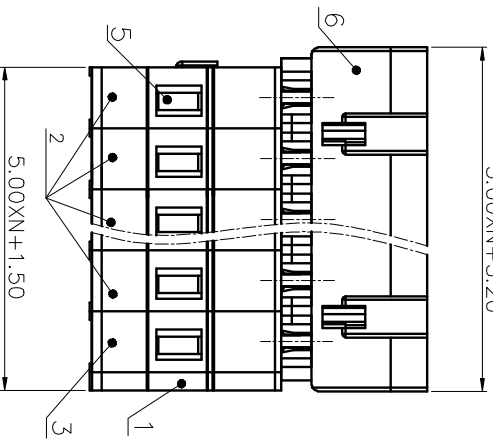
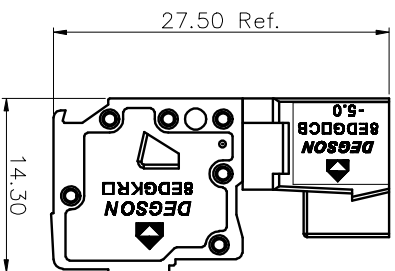
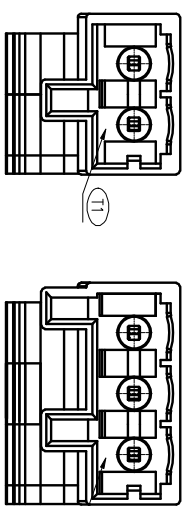


公差/General Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z	±Z

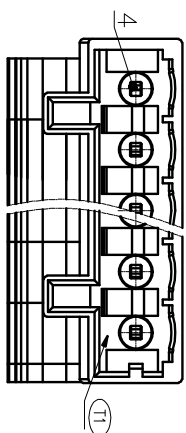

6	housing3	PA66	UL94V-0
5	Spring	Stainless steel	/
4	Pin	Copper	Sn plated
3	Housing2	PA66	UL94V-0
2	Housing1	PA66	UL94V-0
1	Cover	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等	III/3	III/2	II/2
污/Pollution Degree	/	320/20	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	4
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	0.2~2.5/22~14		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	5.00/N=02~24P		
间距/Pitch(mm)/线径范围/Poles	9-10		
剥线长度/Stripping length(mm)	-40~+105		
使用温度范围/Operating temperature(°C)	Yes		
符合RoHS环保要求/Conform to RoHS			
标准颜色编号/Standard color number:	PANTONE 7534u		

MATERIAL: / SURFACE: PANTONE 7534u

NINGBO DEGSON ELECTRICAL CO., LTD

8EDGKRB-5.0-XXP-11-01A(H)

APPD:	NAME:	DRAWING NO.:	REV	T1
CHKD:	8EDGKRB-5.0-XXP-11-01A(H)	8EDGKRB-5.0-C02	REV	T1
DRT:	CenX 2020.06.16	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET 1/1
WVK	Update the drawing			
DATE	2019.03.26			
DESCRIPTION				
ECN				
REV	(T1)			