

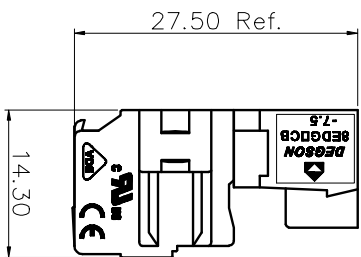
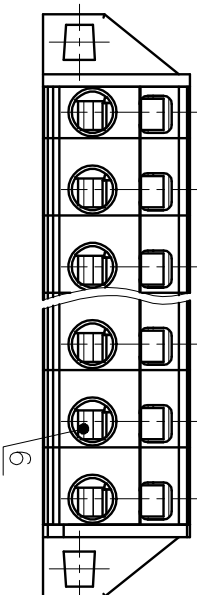
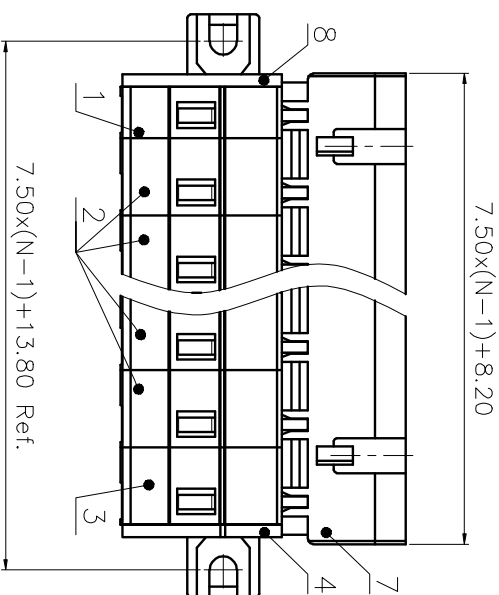


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
													±Z

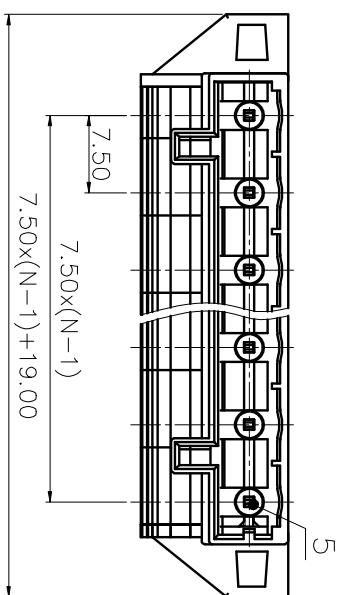

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Housing	PA66	UL94V-0
3	Side Housing2	PA66	UL94V-0
4	Cover-2	PA66	UL94V-0
5	Pin	Copper	Sn Plated
6	Spring	Stainless steel	
7	Housing	PA66	UL94V-0
8	Cover1	PA66	UL94V-0

UL 标准 / UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准 / IEC Standard:			
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III / 3	III / 2	II / 2
额定电压/电涌 / Rated Voltage(V) / Current(A)	/	/	400 / 20
额定脉冲电压 (KV) / Rate Impulse Voltage(KV)	/	/	4
线径范围 (硬线和软线) / Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.2~2.5 / 22~14		
间距/Pitch(mm) / 线数范围/Poles	7.5 / N=02~12P		
剥线长度/Stripping length(mm)	9~10		
使用温度范围 / Operating temperature(°C)	-40~+105		
符合RoHS环保要求 / Conform to RoHS	Yes		
标准颜色编号 / Standard color number:	PANTONE 7534u		

MATERIAL: / SURFACE: /

MAT NO.: /  
 STATUS: /  
 APPD: /

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**  
**8EDGKRGB-7.5-XXP-11-01A(H)**

DRAWING NO.: 8EDGKRGB-7.5-C01  
 TYPE: CUSTOMER DRAWING  
 SCALE: 2:1  
 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE

A B C D

1 2 3 4 5 6