
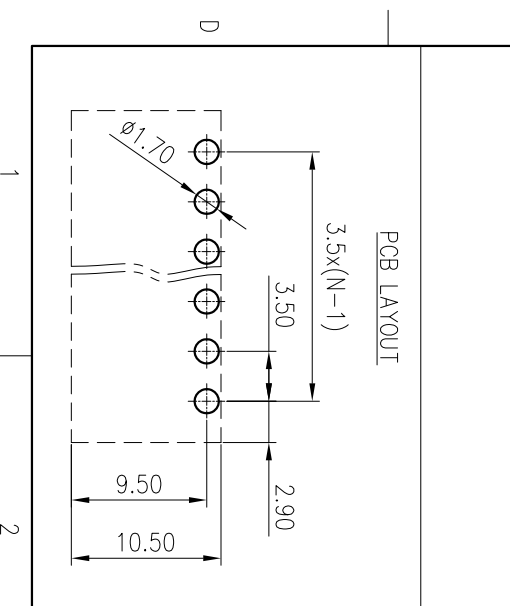

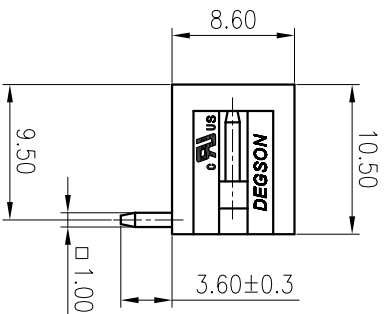


0	~	>3	~	>6	~	>10	~	>18	~	>30	~	>50	~	>80	~	>120	~	>180	~	>250	~	>315	~	>400	0.1/1.0	
~	3	~	6	~	10	~	18	~	30	~	50	~	80	~	120	~	180	~	250	~	315	~	400	~	500	~
+0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.08 ±1.15 ±1.60 ±2.20 ±2.50																										
±Z																										

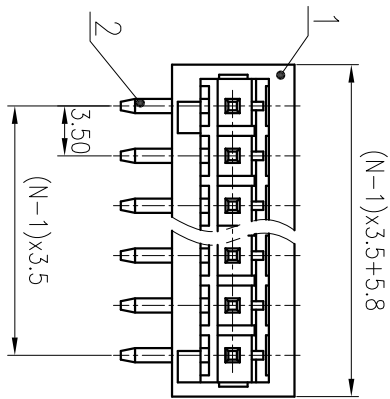

2	Pin	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 / UL Standard:	B	C	D
额定电压 / 电流 / Rated Voltage(V) / Current(A)	300/10	/	300/10
EC 标准 / EC Standard:			
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III / 3		
额定电压 / 电流 / Rated Voltage(V) / Current(A)	130/10		
额定脉冲电压 (KV) / Rate Impulse Voltage(KV)	2.5		
螺丝扭矩 / Torque Tightening(N·m/Lb.in)	/		
线径范围 (硬线和软线) / Wire Range(rigid and flexible)(mm ² /AWG)	/		
间距 / Pitch(mm) / 线数范围 / Poles	3.5 / 02~24P		
剥线长度 / Stripping length(mm)	/		
使用温度范围 / Operating temperature(°C)	-40~+105		
符合 RoHS 环保要求 / Conform to RoHS	Yes		
标准颜色编号 / Standard color number:	PANTONE 7534U		
MATERIAL:	SURFACE: /		
MAT NO.:	/		
STATUS:	/		
APPD:	/		
CHKD:	/		
DRFT: ZhuYYP2020.03.17	DRAWING NO.: 10001577		
TYPE: CUSTOMER DRAWING	SCALE: 2:1 SHEET 1/1		

DEGSON 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: **8EDGRC-3.5-XXP-11-01A(H)**

REV	EON	DESCRIPTION	DRFT	DATE