


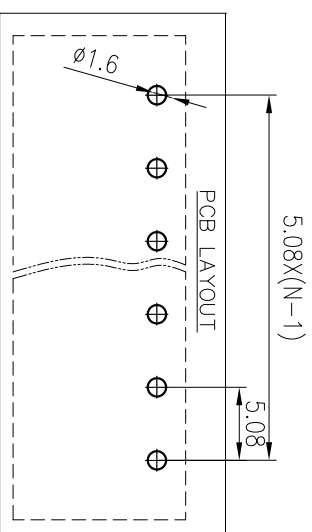

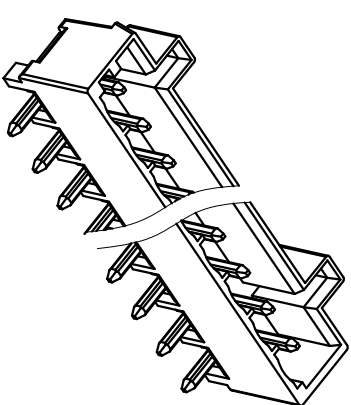

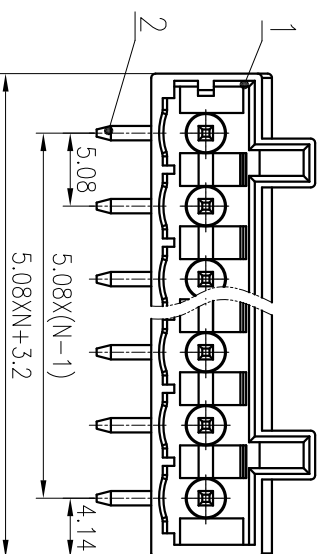





Pitch range in mm		Nominal dimension range						— □ □				
		in mm		Over		Over		Over				
6	10	30	60	100	150	0.1/10						
TO	TO	TO	TO	TO	TO							
6	10	24	30	60	100	150	<					
±0.15/±0.20/±0.30	±0.30/±0.50/±0.70	±1.00	±1.30	±2								

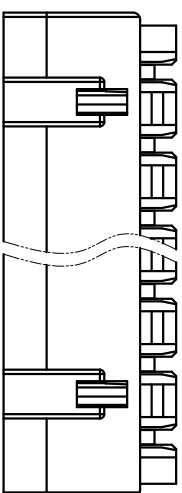

2	Pin	Copper	Sn Plated
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准:	UL Standard:	B	C D
额定电压/电流/Rated Voltage(V)/Current(A)	IEC 标准/IEC Standard:	300/15/15.0/15	300/10
过压类别/Overvoltage Category/ 污染等级/Pollution Degree		III/ 3	II/ 2
额定电压/电流/Rated Voltage(V)/Current(A)		320/20	/
额定脉冲电压(KV)/ Rate Impulse Voltage(KV)		4	/
间距/Pitch(mm)/线数范围 Poles		5.0/ N=02~24P	
使用温度范围/Operating temperature(C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

REV	ECON	DESCRIPTION	DRT	DATE		
MATERIAL: /					SURFACE: /	
MAT NO.: /					<div> 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD</div>	
STATUS: Valid						
APPD:						
CHKD:						
NAME:					8EDGRCB-5.08-XXP-11-01A(H)	
DRT: XieZhp 2020.05.30					DRAWING NO.: 8EDGRCB-5.08-C02	
<div> SIZE: A4</div> <div> $\frac{mm}{inch}$</div>					TYPE: CUSTOMER DRAWING	
					SCALE: 2:1	SHEET 1/1