
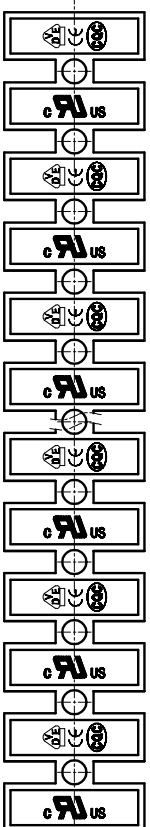

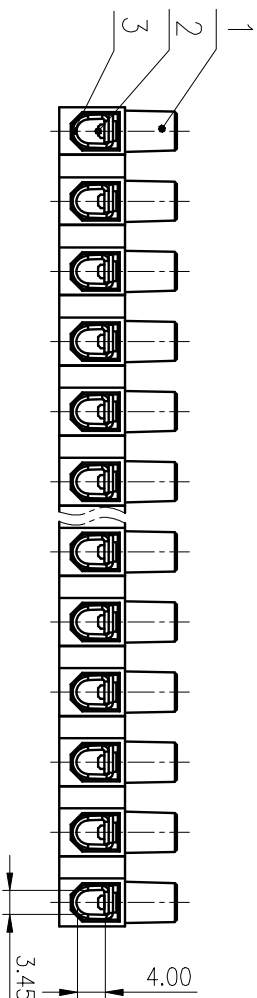


PITCH RANGE	NOMINAL DIMENSION		RANGE	
	IN MM	IN MM	OVER	UNDER
TO 6	10	24	30	100
TO 6	10	24	60	100
TO 6	10	24	100	150
TO 6	10	24	150	150
±0.10/±0.15/±0.25/±0.30/±0.50/±0.70/±1.00/0.05/1.0				

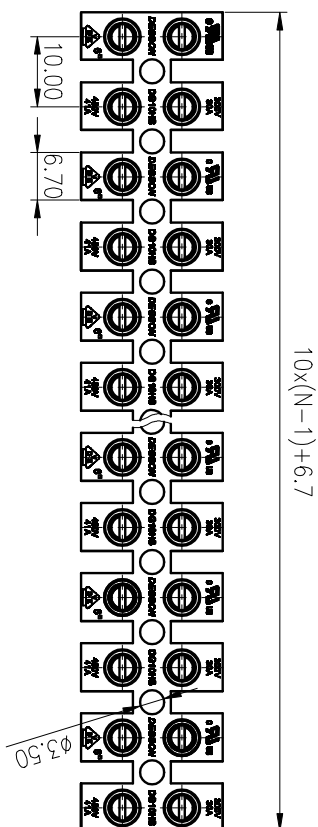

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
APPD:		NAME:	DG10HS-1.2-XXP-1Y-100A(H)
CHKD:		DRAWING NO.:	DG10HS-C06
DRT:	ZDZ 2014.01.10	TYPE:	CUSTOMER DRAWING
REV	ECN	DESCRIPTION	DRAFT
1	2	3	4
5	6	7	8
SIZE: A4	SCALE: 1:1	SHEET	1/1

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/30	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
绝缘/Insulation Degree	/	450/41	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	450/41
额定电涌电压(kV)/Rate Impulse Voltage(kV)	/	/	2.5
额定扭矩/Torque Tightening(N·m/Lbin)	M3, 0.5/4.43		
拧紧范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	1~6/18~10		
间距/Pitch(mm)/线数范围/Poles	10.0		
剥线长度/Stripping length(mm)	9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		

DEGSON[®] NINGBO DEGSON ELECTRICAL CO., LTD
 宁波高松电子有限公司