
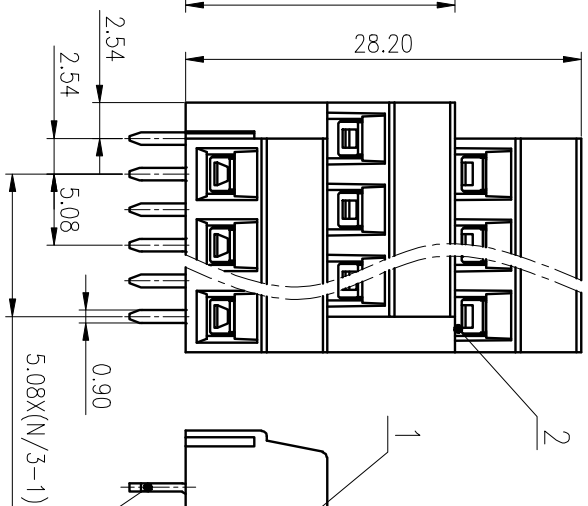
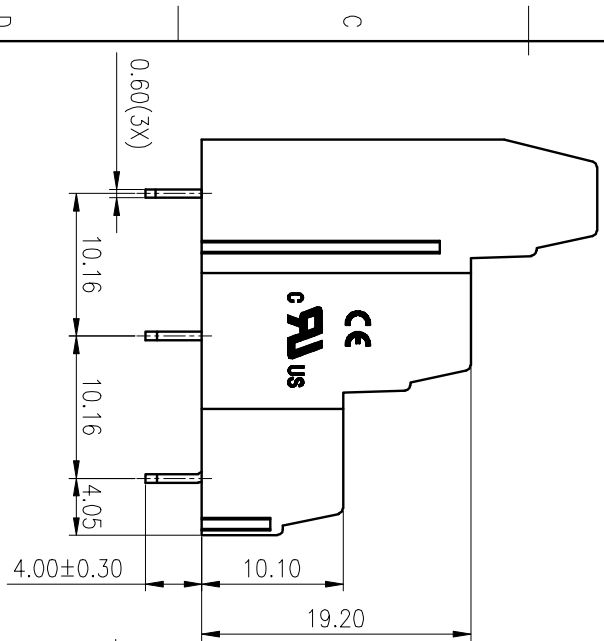
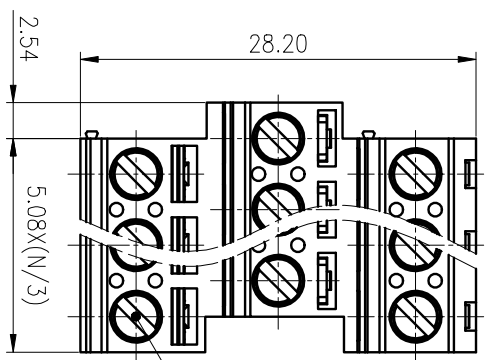


PCB LAYOUT

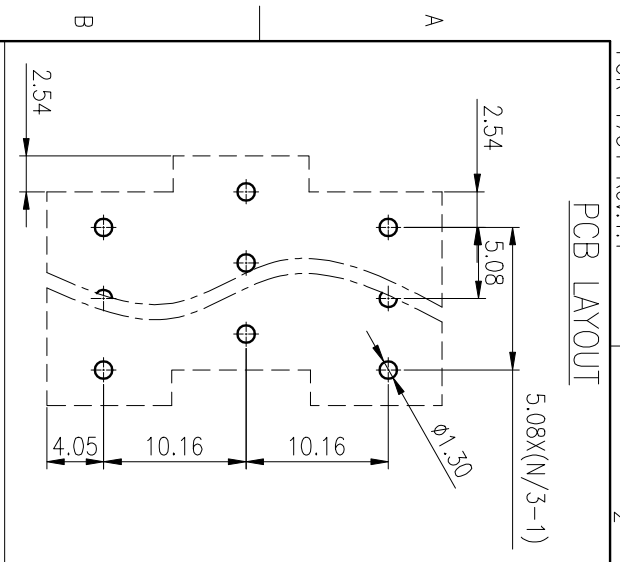

精度等级/General	公差值/Tolerances(mm)
0	>.3
~	>.6
3	>.10
6	>.18
10	>.30
18	>.50
30	>.80
50	>1.20
80	>1.80
120	>2.50
180	>3.15
250	>4.00
315	>5.00
400	>6.30
500	>8.00
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±0.93	±1.05
±1.15	±1.60
±2.20	±2.50
±Z	±Z

ITEM	NAME OF PART	MATERIAL	NOTES
6	Pin Header 3	Copper Alloy	Sn Plated
5	Pin Header 2	Copper Alloy	Sn Plated
4	Pin Header 1	Copper Alloy	Sn Plated
3	Screw	Steel	M3/Zn Plated
2	Cage	Copper Alloy	M3/Ni Plated
1	Housing	PA66	UL94V-0

UL 标准 / UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/12	/	300/10
IEC 标准 / IEC Standard:	/	/	300/10
过压类别 / Overvoltage Category / 特等	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	250/10	400/10	630/10
额定脉冲电压 (KV) / Rate Impulse Voltage (KV)	4.0	4.0	4.0
螺栓扭矩 / Torque Tightening (N·m/Lb.in)	M3: 0.6 / 5.32		
线径范围 (硬线和软线) / Wire Range (rigid and flexible) (mm ² / AWG)	0.2~1.5 / 30~14		
间距 / Pitch (mm) / 线径范围 / Wires	5.08 / N=06~72P		
剥线长度 / Stripping length (mm)	6~7		
使用温度范围 / Operating Temperature (°C)	-40~+105		
符合 RoHS 要求 / Conform to RoHS	Yes		
标准颜色编号 / Standard color number:	/		
PANTONE / RAL	/		

MATERIAL: /
 MAT NO.: /
 STATUS: /
 APPD: LiGL 2020.06.23
 CHKD: Mek 2020.06.23
 DRT: Joy.z 2014.10.28

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
DG127A3-5.08-XXP-1Y-00A(H)

DRAWING NO.: DG127A3-5.08-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 2:1
 SHEET 1/1

REV	ECN	DESCRIPTION	DRT	DATE
1	2	3	4	5