

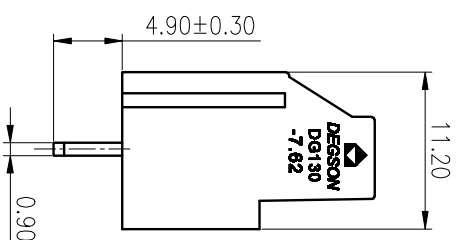
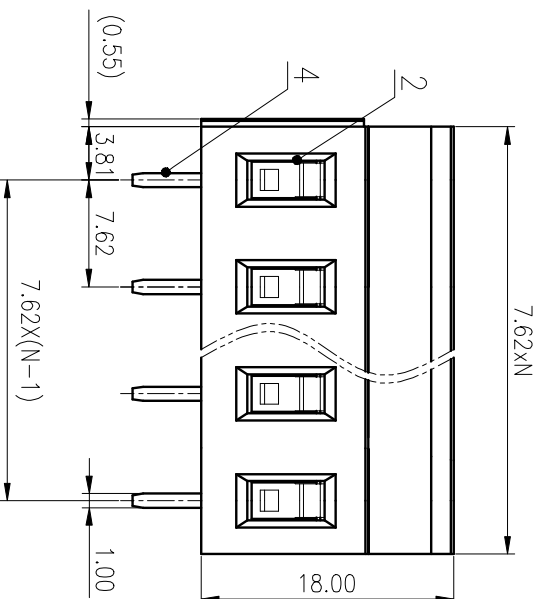
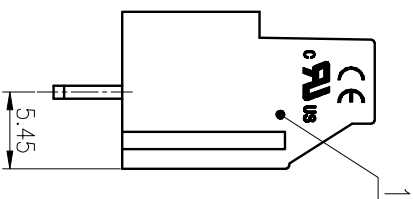


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

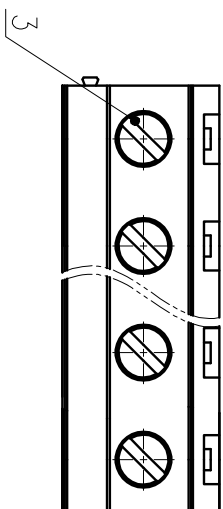

PCB LAYOUT

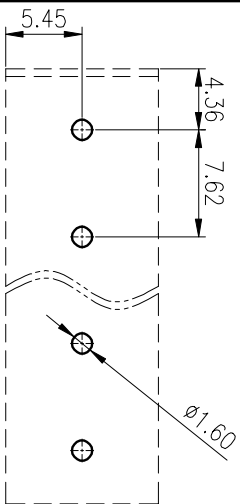

4	Pin Header	Copper Alloy	Sn Plated
3	Screw	Steel	M3/Zn Plated
2	Cage	Copper Alloy	M3/Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/2		
额定电压/电涌/Rated Voltage(V)/Current(A)	450/20		
工频耐压/Withstanding Voltage	AC2500V/1min		
拧紧扭矩/Torque Tightening(N·m/Lb·in)	M3: 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.5~2.5/26~12		
间距/Pitch(mm)/线数范围/Poles	7.62/N=02~24P		
引线长度/Stripping length(mm)	8~9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS标准/Conform to RoHS	Yes		

MATERIAL: /

MAT NO.: /

STATUS: /

Appd: Lanch 2020.03.18

CHKD: YUJZ 2020.03.18

DRT: ZX 2017.04.06

DEGSON[®] NINGBO DEGSON ELECTRICAL CO., LTD
宁波高松电子有限公司

NAME: DG130-7.62-XXP-1Y-00A(H)

DRAWING NO.: DG130-7.62-C01

TYPE: CUSTOMER DRAWING SCALE: 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRT	DATE
1				
2				
3				
4				



SIZE: A4

(inch)

TYPE: CUSTOMER DRAWING

SCALE: 2:1 SHEET 1/1