

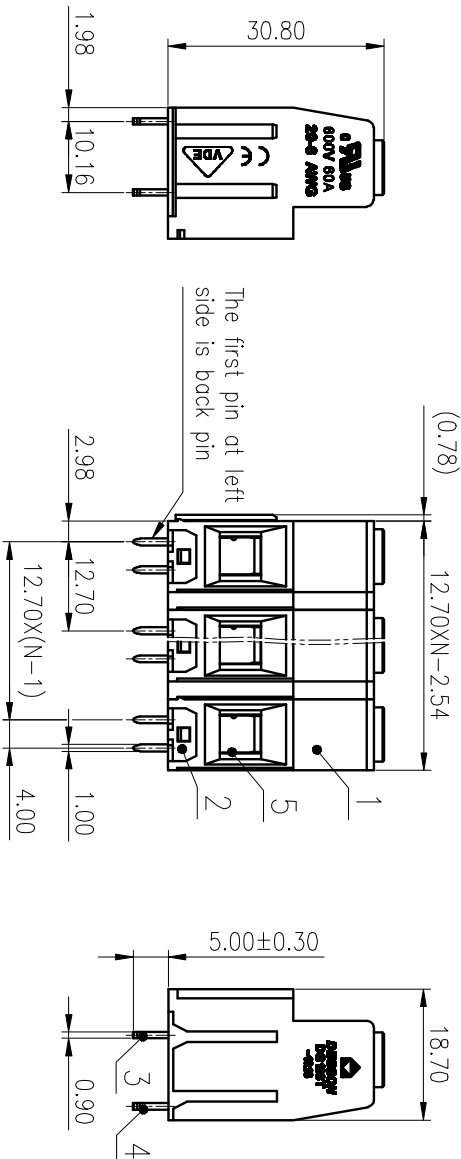


公差等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50			



ITEM	NAME OF PART	MATERIAL	NOTES
7	Clapboard	PA66	UL94V-0
6	Screw	Copper alloy	M4/Ni Plated
5	Cage	Copper alloy	M4/Ni Plated
4	Pin header 1	Copper	Sn Plated
3	Pin header 2	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

PCB LAYOUT

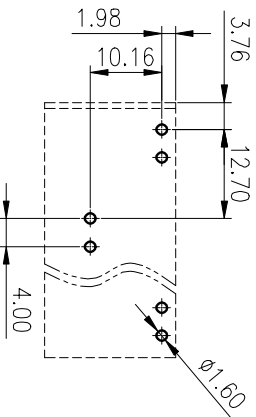

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	600	60	600/60
IEC 标准/IEC Standard:	/		
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/2		
额定电压/电涌/Rated Voltage(V)/Current(A)	1000/76		
工频耐压/Withstanding voltage(V/1min)	AC3500		
螺栓扭矩/Torque Tightening(N·m/Lb·in)	M4: 1.2/10.53		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.5~1.6/20~6		
间距/Pitch(mm)/线数范围/Poles	12.70/N=2~12P		
引线长度/Stripping length(mm)	13~14		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD  
宁波高松电子有限公司

NAME: DG138T-12.7-XXP-1Y-00A(H)

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1:1	REV	SHEET
								T2	1/1

APPD: LanChH 2020.05.20  
STATUS: /  
CHKD: YUJZh 2020.05.20  
DRAFT: Jdy.z 2014.03.21

DRAWING NO.: DG138T-12.7-C01  
MATERIAL: /  
MAT NO.: /  
SURFACE: /