

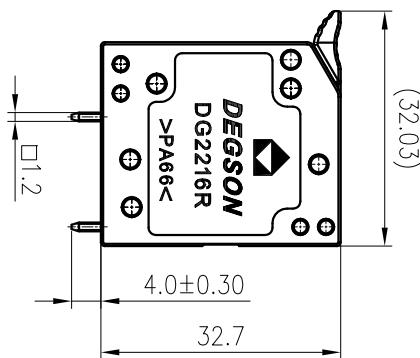
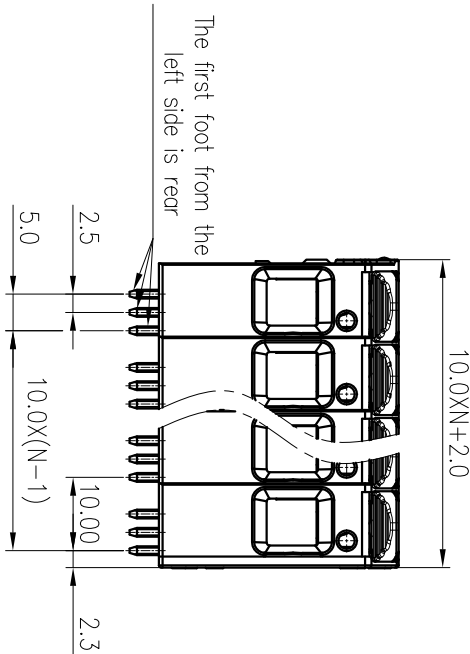
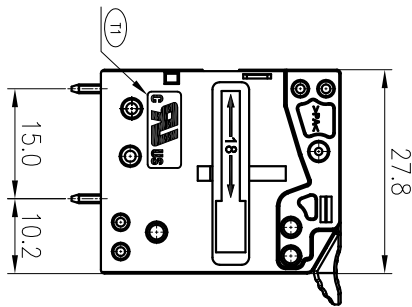
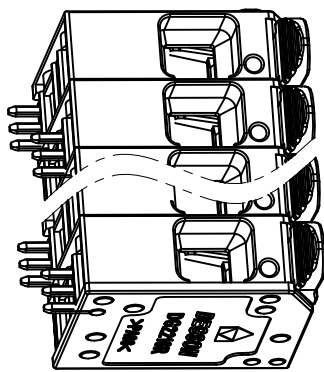


公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>50	>120
~	>6	~	>180
3	~	80	~
~	10	120	~
6	~	180	~
~	18	250	~
~	30	315	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
0.1/10	~	~	~
±2	~	~	~



PCB LAYOUT

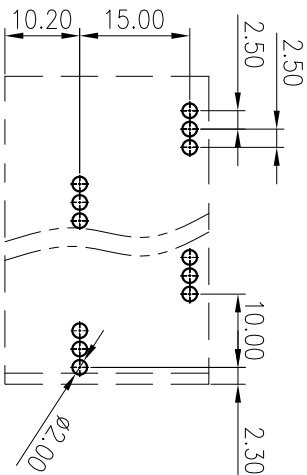

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)	600/66	600/66	66
EC 标准/EC Standard:	/		
过压类别/Overvoltage Category/污秽等级/ Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	1000/76	1000/76	1000/76
额定脉冲电压/电压/Rated Impulse Voltage(KV)	8	8	8
线径范围/硬线和软线/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~16(25mm ² so)/18~4		
间距/Pitch(mm)/线数范围/Poles	10.0/N=02~12P		
剥线长度/Stripping length(mm)	18~20		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

SURFACE: /

MATERIAL: /

MAT NO: /

STATUS: /

APPD: Lan ChH 2021.05.10

CHKD: Yu JZh 2021.05.10

DRAFT: ChenZh 2019.12.05

NAME: **DEGSON**® NINGBO DEGSON ELECTRICAL CO., LTD
宁波高松电子有限公司

DRAWING NO.: 10001003

NAME: DG2216R-10.0-DB-XXP-1Y-00A(H)

TYPE: CUSTOMER DRAWING

SCALE: 1:1

REV	ECN	DESCRIPTION	DRAFT	DATE
①	20210086	1xAdd the UL lettering	Chen Zh	2021.05.10

SIZE: A4

mm

inch

TYPE: CUSTOMER DRAWING

SCALE: 1:1

REV	T1
1/1	1/1