

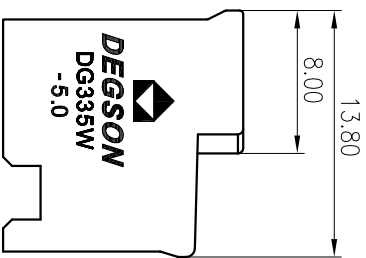
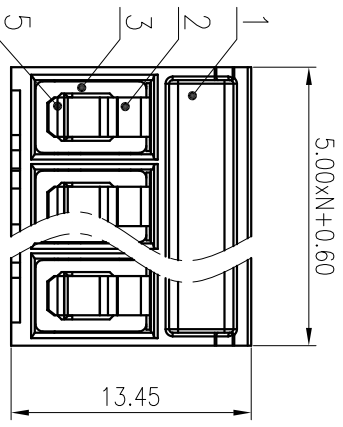


| 公差/General Tolerances(mm) | | D | 0.1/10 |
|---------------------------|-------|-------|--------|
| 0 | >3 | | |
| ~ | >6 | ~ | >500 |
| 3 | ~ | ~ | ~ |
| 6 | 10 | ~ | ~ |
| 18 | 30 | ~ | ~ |
| 30 | 50 | ~ | ~ |
| 50 | 80 | ~ | ~ |
| 80 | 120 | ~ | ~ |
| 120 | 180 | ~ | ~ |
| 180 | 250 | ~ | ~ |
| 250 | 315 | ~ | ~ |
| 315 | 400 | ~ | ~ |
| 400 | 500 | ~ | ~ |
| 500 | ~ | ~ | ~ |
| ±0.12 | ±0.18 | ±0.22 | ±0.26 |
| ±0.31 | ±0.37 | ±0.57 | ±0.80 |
| ±0.93 | ±1.05 | ±1.15 | ±1.60 |
| ±2.20 | ±2.50 | ±2.50 | ±2.50 |

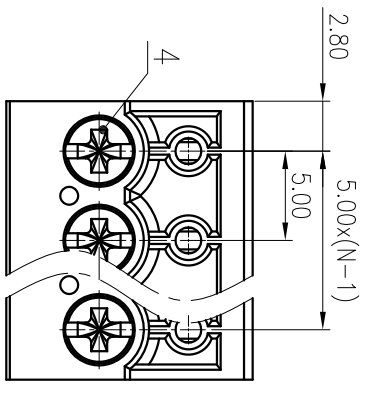

| | | | |
|---|---------|-----------------|-----------------|
| 5 | Clamp | Copper alloy | Sn Plated |
| 4 | Screw | Steel | M3/Zn-Ni Plated |
| 3 | Cage | Copper alloy | M3/Ni Plated |
| 2 | Spring | Stainless steel | |
| 1 | Housing | PA66 | UL94V-0 |

ITEM NAME OF PART MATERIAL NOTES

UL 标准/UL Standard: B C D

额定电压/电流/Rated Voltage(V)/Current(A) 300/10 / 300/10

EC 标准/IEC Standard: III/3 III/2 II/2

过压类别/Overvoltage Category/污染等级 III/3 III/2 II/2

额定电压/电流/Rated Voltage(V)/Current(A) 250/12 320/12 630/12

额定脉冲电压(KV)/Rate Impulse Voltage(KV) 4 4 4

拧紧扭矩/Torque Tightening(N·m/Lb·in) M3, 0.5/4.43

线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG) 0.2~2.5/28~12

间距/Pitch(mm)/线数范围/Poles 5.00/N=02~12P

剥线长度/Stripping length(mm) 5~6

使用温度范围/Operating Temperature(°C) -40~+105

符合RoHS环保要求/Conform to RoHS Yes

MATERIAL:

表面:

DEGSON[®] NINGBO DEGSON ELECTRICAL CO., LTD

宁波高松电子有限公司

NAME: DG335W-5.0-XXP-1Y-00A(H)

DRAWING NO.: DG335W-5.0-C01

TYPE: CUSTOMER DRAWING

SCALE: 2.5:1 SHEET 1/1

| REV | ECN | DESCRIPTION | DRAFT | DATE |
|-----|-----|-------------|-------|------|
| 1 | | | | |

| | | |
|----------|----|------|
| SIZE: A4 | mm | inch |
|----------|----|------|

| | |
|-----|------|
| REV | DD-2 |
|-----|------|