


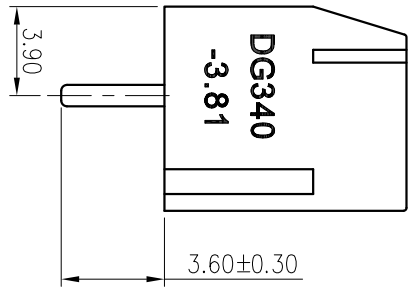
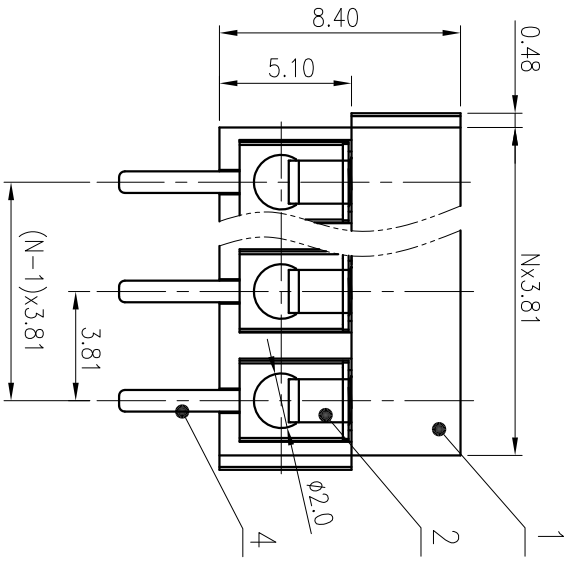


公差/General Tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2.50	±2

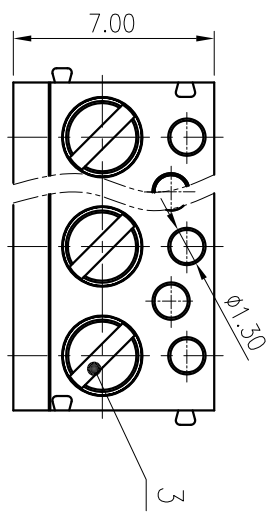

Ø0.80±0.05

PCB LAYOUT

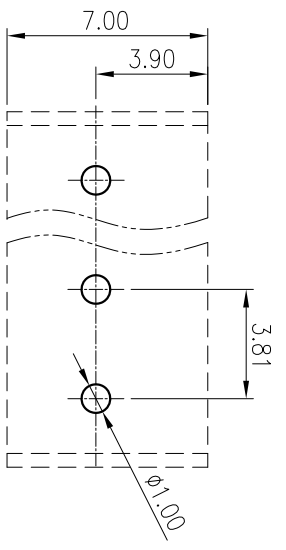

ITEM	NAME OF PART	MATERIAL	NOTES
4	Pin header	Copper alloy	M2/Sn plated
3	Screw	Steel	M2/Zn plated
2	Spring	Stainless steel	/
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/电压/Rated Voltage(V)	Current(A)	300/7	/	/
EC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等		III/3	III/2	II/2
级/Pollution Degree		/	130/10	/
额定电压/电流/Rated Voltage(V)/Current(A)		/	130/10	/
工频耐压/Withstanding voltage(V/Min)		AC1250		/
螺丝扭矩/Torque Tightening(N·m/Lb·in)		M2, 0.20/1.77		/
绞合范围(硬绞和软绞)/Wire Range(rigid and flexible)(mm ² /AWG)		0.5~1.0/24~18		/
间距/Pitch(mm)/绞合范围/Poles		3.81/N=02~24P		/
剥线长度/Stripping length(mm)		5-6		/
使用温度范围/Operating Temperature(°C)		-40~+105		/
符合RoHS环保要求/Conform to RoHS		Yes		/

SURFACE:

NINGBO DEGSON ELECTRICAL CO., LTD

DC340-3.81-XXP-1Y-00A(H)

REV	ECN	DESCRIPTION	DRT	DATE	SIZE	SCALE	SHEET
1					A4	4:1	1/1

NAME: DC340-3.81-XXP-1Y-00A(H)

DRAWING NO.: DC350R-3.96-C04

MATERIAL:

MAT NO.:

STATUS:

APPROVED: CHH 2020.05.25

CHKD: YU JZH 2020.05.25

DRT: Song 2016.01.18

NINGBO DEGSON ELECTRICAL CO., LTD

DC340-3.81-XXP-1Y-00A(H)

DRAWING NO.: DC350R-3.96-C04

MATERIAL:

MAT NO.:

STATUS:

APPROVED: CHH 2020.05.25

CHKD: YU JZH 2020.05.25

DRT: Song 2016.01.18