


公差等级/General Tolerances(mm)		0.1/1/10	
0	>3	>10	>315
~	~	~	~
3	6	10	180
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±5.00	±7.50

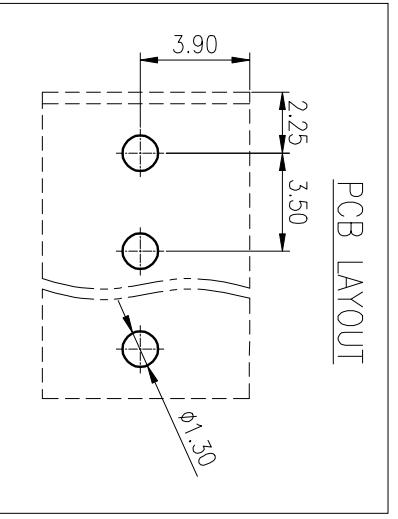

4	Screw	Steel	M2/Zn Plated
3	Pin header	Copper alloy	Sn Plated
2	Cage	Copper alloy	M2/Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准	UL Standard:	B	C
UL 标准	UL Standard:	B	C
额定电压/电涌/Rated Voltage(V)/Current(A)	300/10	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/特等	/	III/2	/
级/Pollution Degree	/		
额定电压/电涌/Rated Voltage(V)/Current(A)	/	130/10	/
工额电压/Withstanding Voltage(V/Min)	/	AC1250	/
螺栓扭矩/Torque Tightening(N·m/Lb.in)	M2, 0.2/1.77		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.5~1.0/26~16		
间距/Pitch(mm)/线径范围/Poles	3.50/N=02~24P		
剥线长度/Stripping length(mm)	5~6		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:			
PANTONE / RAL	/		

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: Li GL 2020.06.22

CHKD: Mco J 2020.06.22

DRT:Wgng LX 2020.06.22

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**

DG381-3.5-XXP-1Y-00A(H)

DRAWING NO.: 10000242

TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRT	DATE	SIZE: A4	SCALE: 4:1	REV	T1
1							1/1	

1 2 3 4 5 6