
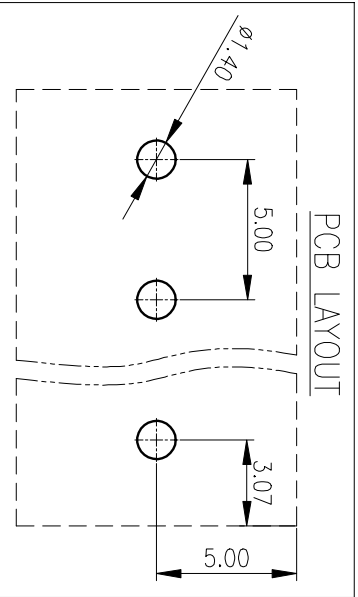
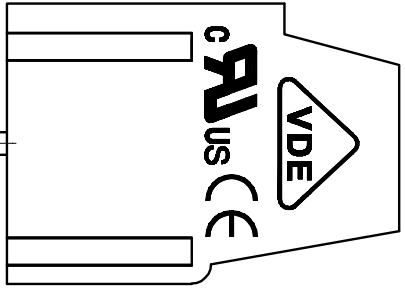
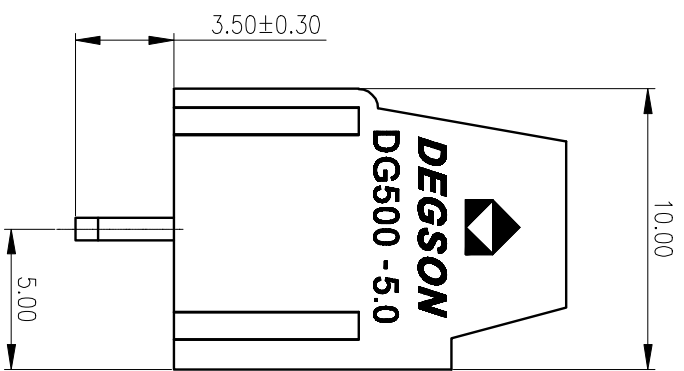
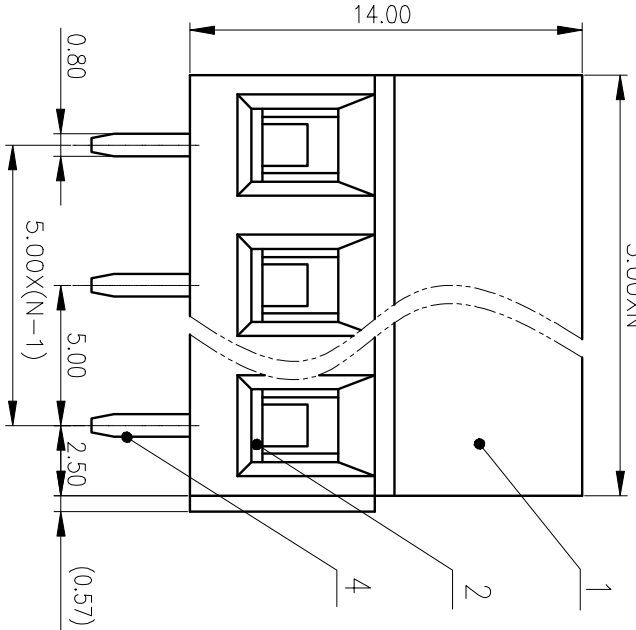


公差等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±Z	±Z

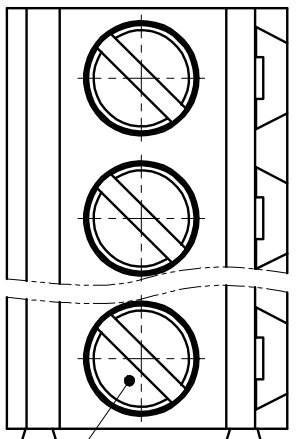

4	Pin Header	Copper Alloy	Sn Plated
3	Screw	Steel	M3/Zn Plated
2	Cage	Copper Alloy	M3/Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/20	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/2	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	/	/	250/18
工频耐压/Withstanding Voltage(V)/min	/	/	AC2000
拧紧扭矩/Torque Tightening(N·m/Lbin)	M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	1.0~2.5/30~12		
间距/Pitch(mm)/线数范围/Poles	5.0/N=02~24P		
剥线长度/Stripping length(mm)	6~7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD: LiGL	2020.06.11
CHKD: Mek	2020.06.11
DRT: LuoXM	2020.06.11
NAME:	DEGSON <sup>®</sup> NINGBO DEGSON ELECTRICAL CO., LTD
DRAWING NO.:	DG500-5.0-C35
TYPE:	CUSTOMER DRAWING
SCALE:	4:1
REV	T1
SHEET	1/1

REV	ECN	DESCRIPTION	DRT	DATE
1				
2				
3				
4				
5				
6				