
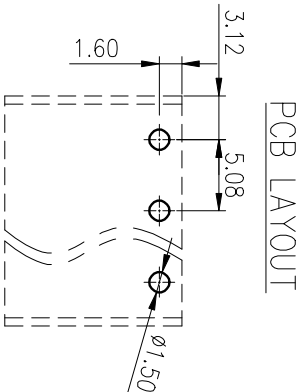
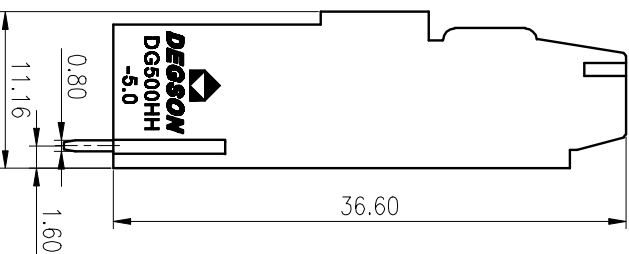
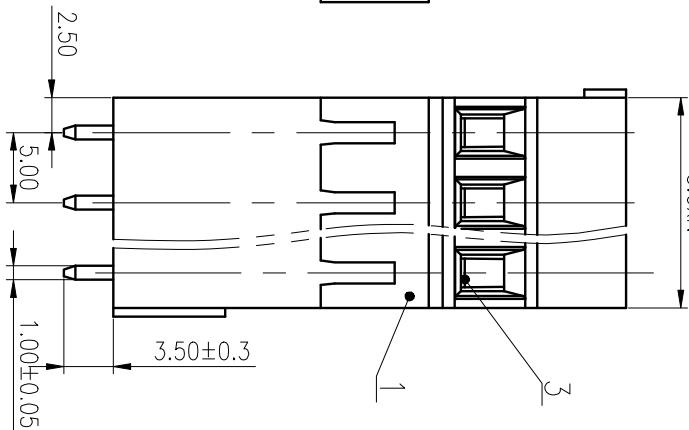
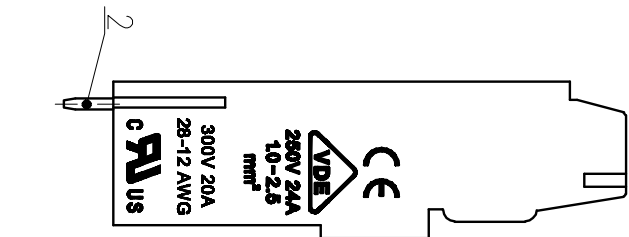


精度等级/General Tolerances(mm)		公差带										形位公差		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z



REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET 1/1
MATERIAL: /					SURFACE: /			
MAT NO.: /					NINGBO DEGSON ELECTRICAL CO., LTD			
STATUS: /					NAME: DG500HH-5.08-XXP-1Y-00A(H)			
APPD: LGL 2020.06.18					DRAWING NO.: DG500HH-5.0-C03			
CHKD: MGEK 2020.06.18					REV T4			
DRAFT: Home 2006.06.01					REV T4			

4	Screw	Steel	Zn Plated
3	Cage	Copper alloy	Ni Plated
2	Header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	/	250/18	/
工频耐压/Withstanding Voltage(V/min)	/	AC2000	/
拧紧扭矩/Torque Tightening(N·m/Lb·in)	M2.5, 0.4/3.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	1.0~2.5/28~12		
剥线长度/Stripping length(mm)	5.08/N=02~24P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		