


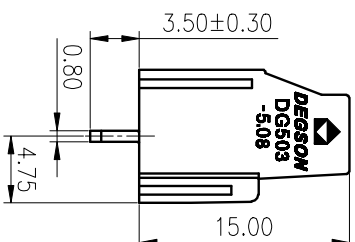
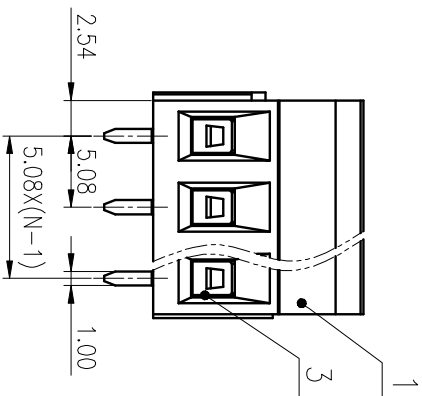


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
+0.12	+0.18	+0.22	+0.26	+0.31	+0.37	+0.57	+0.80	+0.93	+1.05	+1.15	+1.60	+2.20	+2.50	±Z

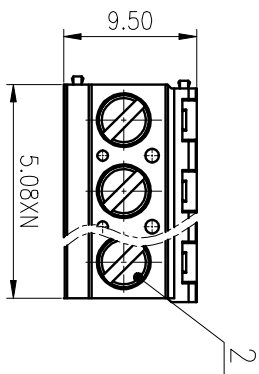

PCB LAYOUT

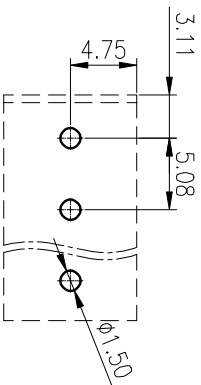

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE	TYPE	SCALE	SHEET
1					A4	CUSTOMER DRAWING	2:1	1/1

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	NAME: DG503-5.08-XXP-1Y-00A(H)	
Appd: LanChH 2020.05.14		DRAWING NO.: DG503-5.08-C01	
CHKD: YUJZ 2020.05.14		DRAFT: ChenZh 2020.05.14	
DRAFT: ChenZh 2020.05.14		TYPE: CUSTOMER DRAWING	

ITEM	NAME OF PART	MATERIAL
4	Pin header	Copper
3	Cage	Copper alloy
2	Screw	Steel
1	Housing	PA66

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:	450/20		
工频耐压/Withstanding voltage(AC KV/1Min)	2.5		
拧紧扭矩/Torque Tightening(N·m/Lbin)	M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.2~2.5/28~12		
引线长度/Stripping length(mm)	5.08/N=02~24P		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		