
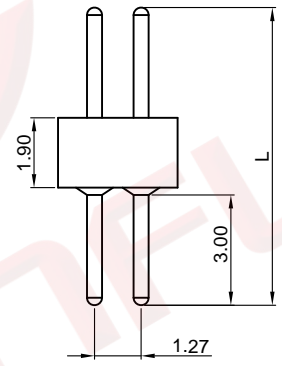

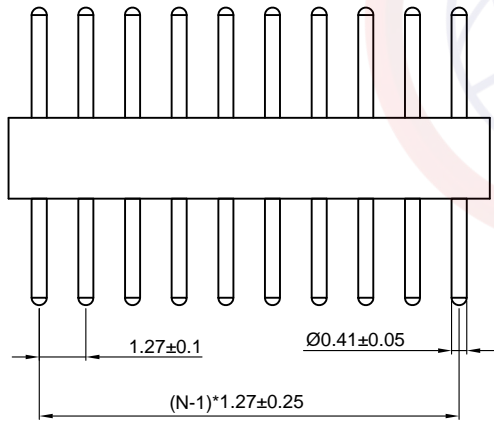



Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/30/17'	HZW 08/30/17'	LJC 08/30/17'
B	DRAWING UPDATE	JLZ 07/23/18'	~	

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

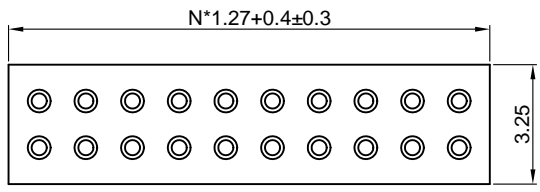


Single Row
N=No. of contacts

Double Row
N=No. of contacts/2

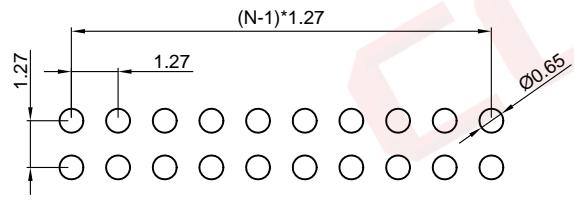

Recommended PCB Layout

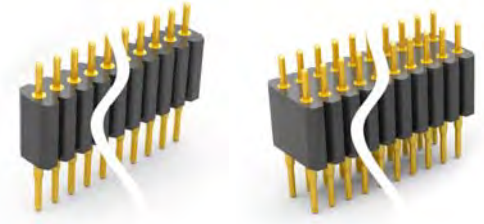


(Series Image-Reference Only)

NOTES:

- Specifications:
 - Contact resistance: 20mΩ Max.
 - Dielectric withstanding voltage: 500V AC for 1 minute.
 - Insulation resistance: 1000MΩ Min.
 - Operating temperature: -40°C~+105°C.
 - Current rating: 1.0A Per Pin Max.

2. Product number code:

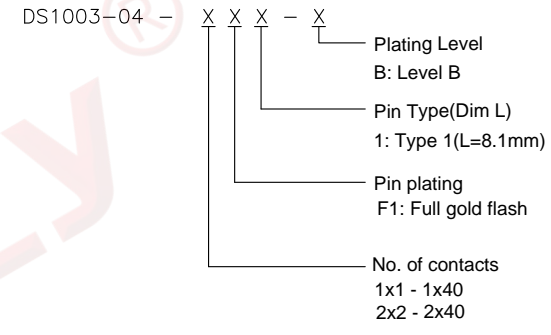

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.27mm IC Header(Machine Pin) DIP Type H=1.9~2.2mm
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1003-04 SERIES
.X	±0.38	.X	±3°				
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET	1 OF 1			
DRAWING NO.		C-DS1003-04-XXXXX-B					

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD